
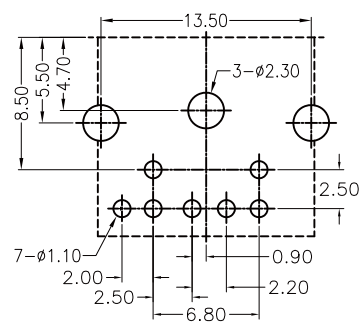
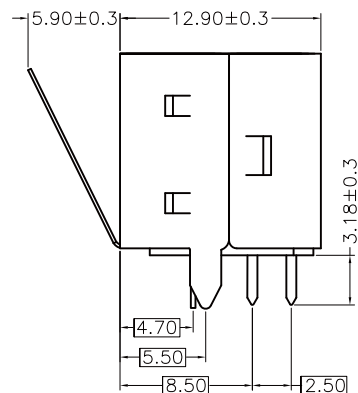
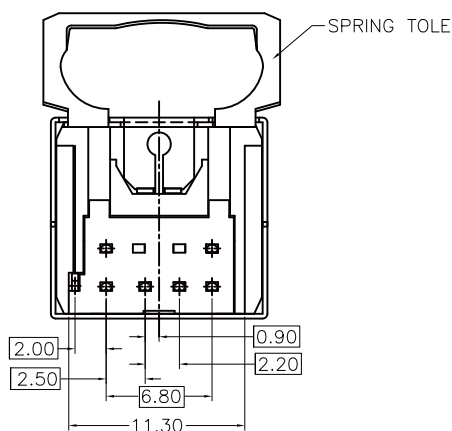
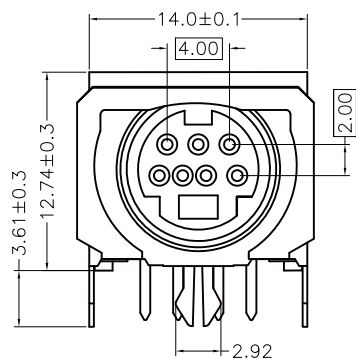


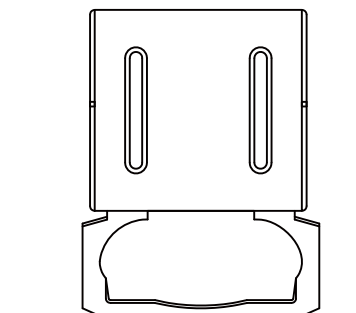

P.C.B. LAYOUT

MATERIAL

INSULATOR: PBT UL94V-0

CONTACT: Phosphor bronze, Gold/Tin plated

SHELL: Brass, Tin plated

SPRING TOLE: SUS304

ENVIRONMENTAL

OPERATING TEMPERATURE: -55°C~105°C

ELECTRICAL

CONTACT CURRENT RATING: 1 Amp

DIELECTRIC WITHSTANDING : AC 500V/min.R.M.S.

INSULATION RESISTANCE: 500MVmin.at 500V DC

CONTACT RESISTANCE: 30mV Max

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.20
.XX ± 0.10
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MDJ-FS-07B-LF
SERIES | LEADFREE
07 WAY B TYPE
SPRING
FULL METAL

DESCRIPTION: 迷你單層特殊型7P 半金黑 (鐵殼鍍錫無嘜加小彈片) 無毒