
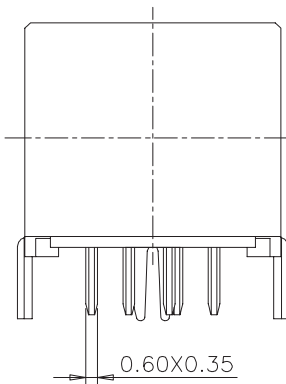


P.C.B. RECOMMEND LAYOUT
(BOTTOM VIEW)

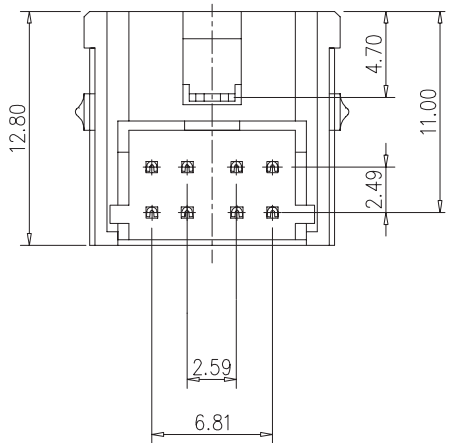

NOTES:

- MATERIAL :
HOUSING : THERMOPLASTIC, GLASS FIBER FILLED
UL 94V-0 RATED.
CONTACT : PHOSPHOR BRONZE
OUTER SHIELD : SPCC
INNER SHIELD : SPCC
- FINISH :
CONTACT : UNDER PLATED 50u"MIN. NICKEL ,OVER ALL
120u" MIN. TIN IN SOLDERING AREA,
SELECTIVE GOLD PLATED IN CONTACT AREA.
OUTER SHIELD : L:BRIGHT TIN , PLATED WITH 120u"THICK,
OVER 50u" THICKNESS Ni.
S:TIN , PLATED WITH 120u"THICK.
OVER 100u" THICKNESS Cu.
N:NICKEL , PLATED WITH 120u"THICK.
OVER 100u" THICKNESS Cu.
G:TIN , PLATED WITH 120u"THICK,
OVER 100u" THICKNESS Cu.
INNER SHIELD : L:BRIGHT TIN , PLATED WITH 120u"THICK.
OVER 50u" THICKNESS Ni.
S:TIN , PLATED WITH 120u"THICK.
OVER 100u" THICKNESS Cu.
N:NICKEL , PLATED WITH 120u"THICK.
OVER 100u" THICKNESS Cu.
G:GOLD FLASH , OVER 100u" THICKNESS Cu.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PJECTION

照片框

ORDER INFORMATION

MDJ-M-08A-LF
SERIES | LEADFREE
| A TYPE
| 08WAY
| REAR METAL

DESCRIPTION: