
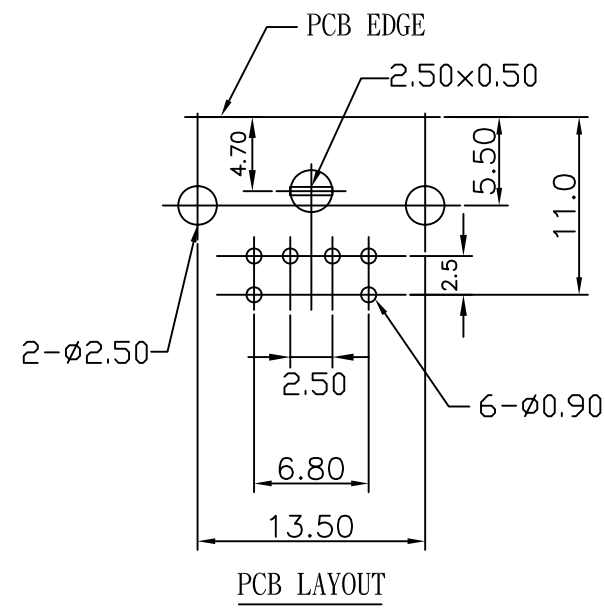
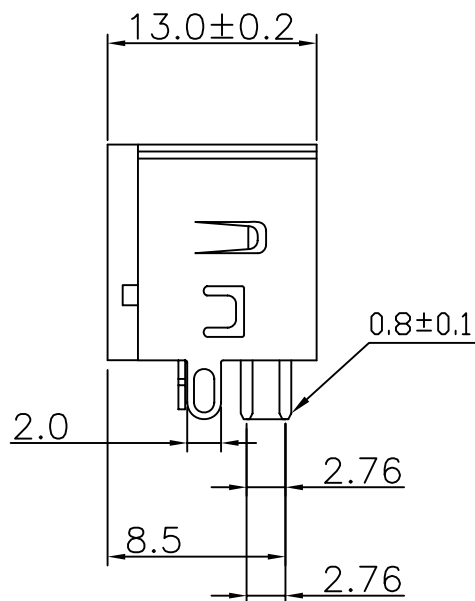
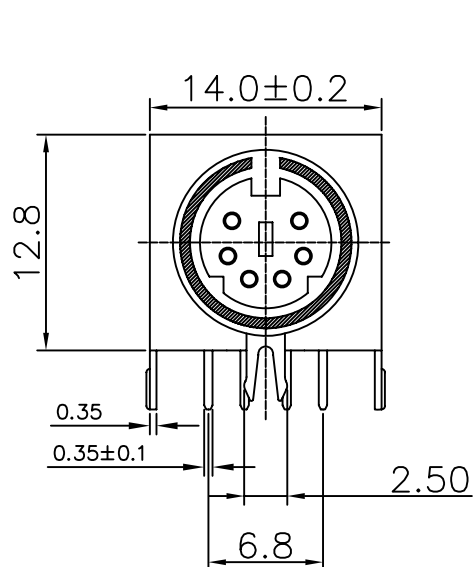


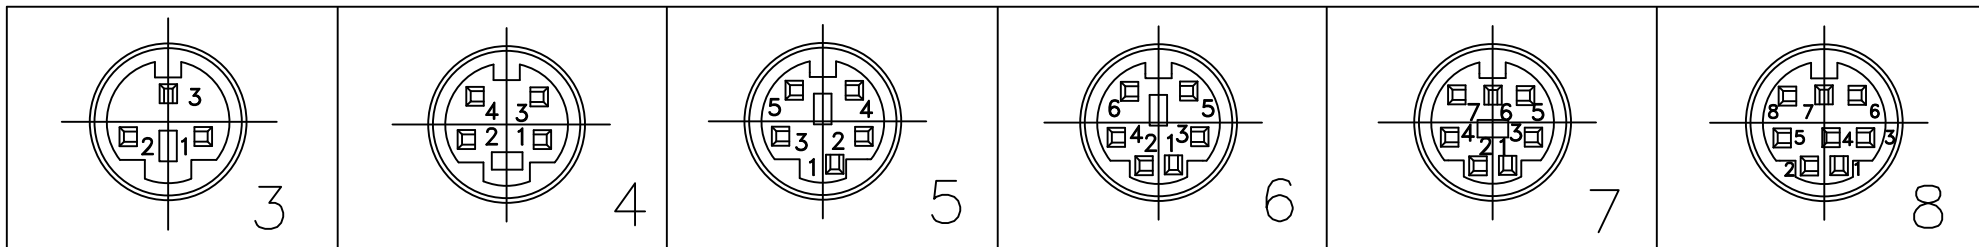

3. SPECIFICATIONS:

Electrical:

Current Rating:100V AC 1A MAX. 12V DC 2A MAX.

Insulation Resistance:500MΩ MIN. at 500V DC

Dielectric Strength:500V AC/1 minute

Contact Resistance:30 mΩ MAX.

Mechanical:

Insertion Force:4.5KG MAX.

Withdrawal Force:0.9KG ~3.0 KG

Contact Retention Force:1.02KG MIN.

NOTES:

1. MATERIAL:

SHELL :BS H=0.35t NICKEL PLATE

HOUSING :PBT UL94V-0

PIN :BS H=0.5t Sn PLATE

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

MDJ-M-xx-LF
SERIES | LEADFREE
03-08WAY
METAL

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.20
.X ± 0.10
.XX ± 0.05
.XXX ± 0.005
ANG ±

DESCRIPTION: MINI DIN PCB 4 SIDE SHIELDED