


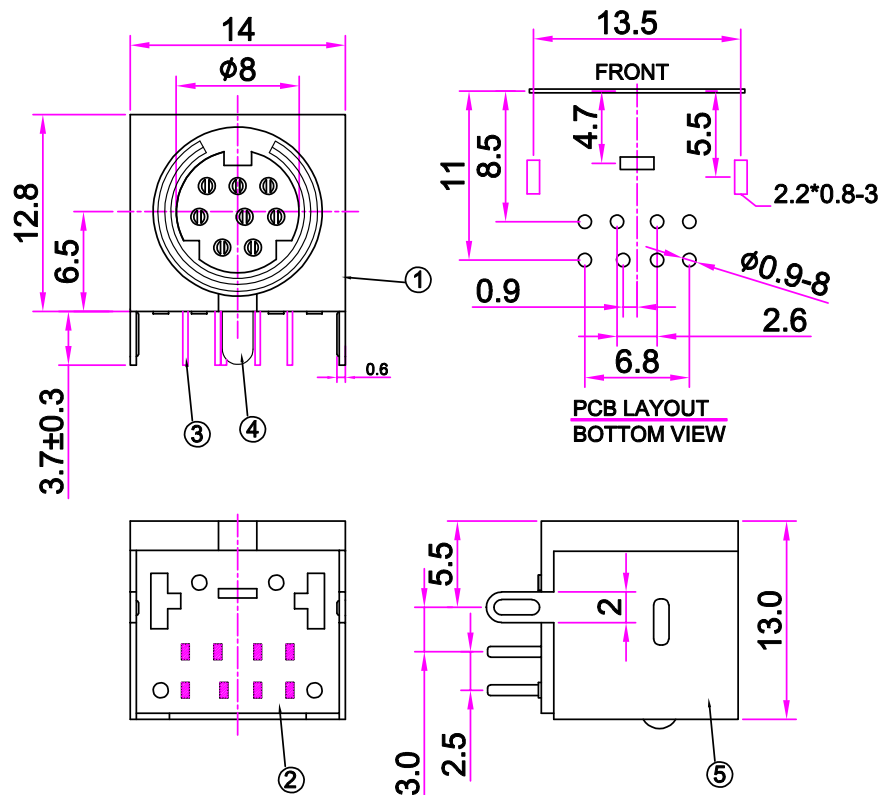

SPECIFICATIONS:

1. CURRENT CARRYING CAPACITY:

1) AC: 100V 1A MAX.

2) DC: 12V 2A MAX

2. CONTACT RESISTANCE: BEFORE TEST: 30m OHM MAX.

AFTER TEST: 80m OHM MAX.

3. INSULATION RESISTANCE: BEFORE TEST: 50M OHM MIN. AT DC 250V.

AFTER TEST: 10M OHM MIN. AT DC 250V.

4. VOLTAGE WITHSTAND: AC 250V 1 MINUTE.

5. INSERTION FORCE: BEFORE TEST: 1KG~5KG.

AFTER TEST: (1KG~5KG)±30%.

WITHDRAWAL FORCE: BEFORE TEST: 0.8KG~3.5KG.

AFTER TEST: (0.8KG~3.5KG)±30%.

6. LIFE TEST: 1000PCS CYCLES MIN, AT THE CONCLUSION OF THIS TEST, THE JACK SHALL COMPLY WITH PARAGRAPHS 2,3,4 AND 5 .

7. UNLESS OTHER SPECIFIED, TOLERANCE IS ±0.2mm.

ARRANGEMENT OF CONTACTS						
NO OF CONTACTS	3	4	5	6	7	8
MODEL NO	MDJ-N-03	MDJ-N-04	MDJ-N-05	MDJ-N-06	MDJ-N-07	MDJ-N-08
HOLE LAYOUT						

5	SHIELDING PLATE	1	SPCC	TIN PLATED
4	EARTH TERMINAL	1	BSR	NICKEL PLATED
3	CONTACT TERMINAL	3-8	PBR	SILVER PLATED
2	COVER	1	PBT	BLACK
1	BODY	1	PBT	BLACK
P/N	PART NAME	QTY	MATERIAL	PLATING

RoHS Compliant

TOLERANCES ARE

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

MDJ-N-xx-LF
SERIES | LEADFREE
03-08 WAY
NEW TYPE

DESCRIPTION:

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com