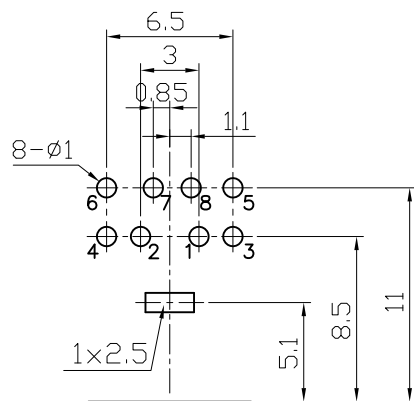
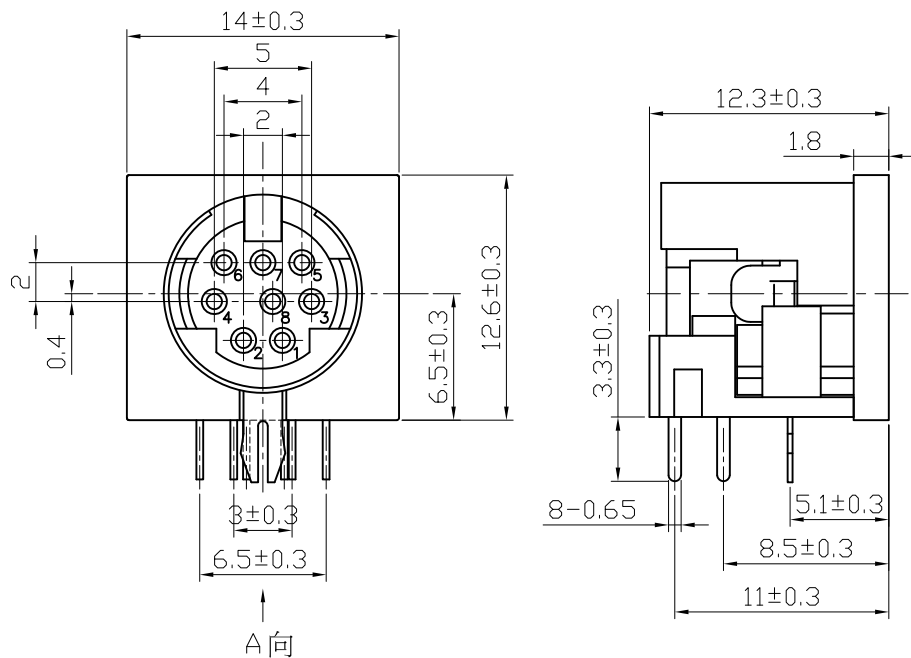


PCB板安装孔图

主要技术特性要求:

1. 使用条件:

环境温度: $-25\sim+70^{\circ}\text{C}$

相对湿度: 95% (40°C)

2. 额定负荷: 2A 12V DC

3. 接触电阻: $\leq 30\text{m}\Omega$

4. 绝缘电阻: $\geq 100\text{M}\Omega$

5. 耐压: 250V AC (50Hz) 1min

6. 插拔力: 5-50N

7. 寿命: ≥ 5000 次

11	竖 针	1	黄铜0.35mm	D. Cu/Sn			
10	弯 针	1	黄铜0.35mm	D. Cu/Sn			
9	左长针	1	黄铜0.35mm	D. Cu/Sn			
8	左中针	1	黄铜0.35mm	D. Cu/Sn			
7	左短针	1	黄铜0.35mm	D. Cu/Sn			
6	右长针	1	黄铜0.35mm	D. Cu/Sn			
5	右中针	1	黄铜0.35mm	D. Cu/Sn			
4	右短针	1	黄铜0.35mm	D. Cu/Sn			
3	包 圆	1	黄铜0.25mm	D. Cu/Sn			
2	塑料后盖	1	PBT				
1	基 座	1	PBT				
序号	名 称	数 量	材 料	处 理	单件 质 量	总计 质 量	备 注

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.25
.XXX ± 0.15
ANG ± 2°

照片框

ORDER INFORMATION

MDJ-S-08-LF
SERIES | LEADFREE
08 WAY
ALL PLASTIC

DESCRIPTION: