


*
 T:1.6 Dimensions of PC board holes
 Tolerance : ±0.05(Printed-top view)

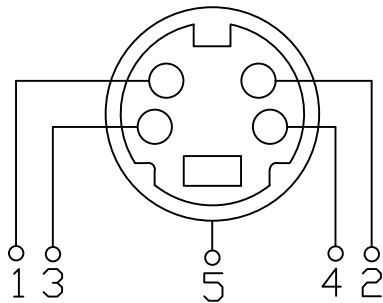

SCHMATIC

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ±0.3

| | | | | |
|-----|----------------|-----|----------|----------------|
| 4 | CONTACT FOOT | 1 | C2680 | Cu/Sn PLATED |
| 3 | GROUND CONTACT | 1 | C2680 | Cu/Sn PLATED |
| 2 | CONTACT FOOT | 4 | C5191 | Ag PLATED |
| 1 | HOUSING | 1 | PBT 4815 | UL-94V0(BLACK) |
| LTR | PART NAME | QTY | MATERIAL | REMARK |

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

DRAWING BY CY

X.±

CHECKED BY GENIUS

.X±

UNIT / mm

SCALE 1 : 1

.XXX±

DATE

ANG±

SIZE A4

PJECTION

照片框

ORDER INFORMATION

MDJ-SE-04-LF
 SERIES | LEADFREE
 04 WAY
 EAR
 FEMALE

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: S JACK