
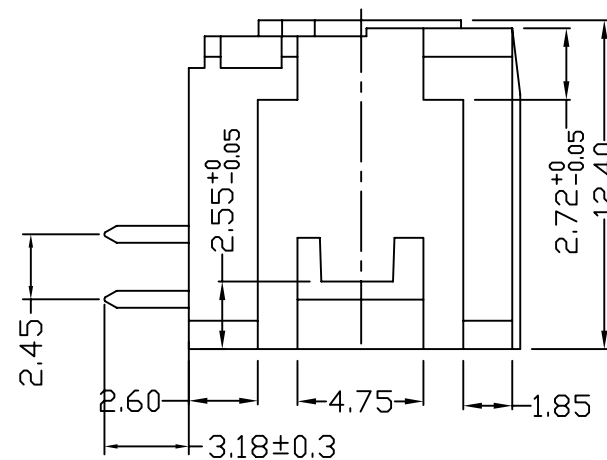


MATERIAL
 INSULATOR: LCP UL94V-0
 CONTACT: Phosphor bronze, Gold/Tin Plated

ENVIRONMENTAL
 OPERATING TEMPERATURE: -55°C~105°C
 ELECTRICAL
 CONTACT CURRENT RATING: 1 Amp
 DIELECTRIC WITHSTANDING : AC 1000V/min.R.M.S.
 INSULATION RESISTANCE: 500M Ω min.at 500V DC
 CONTACT RESISTANCE: 30mV Max

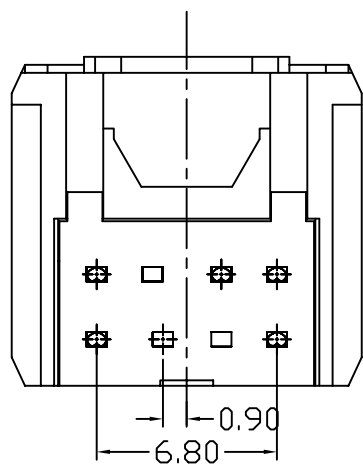

MORETHANALL
 CONNECTORS
 ASSEMBLIES

PART NO. MDJ-SLCP-05

DWG NO. MDJ-SLCP-05

CHECKED BY CY

TOLERANCES ARE

DESCRIP TION: 迷你單層5P母半金黑無鐵殼半成品LCP無毒

FILE NO.

DRAWING BY


.X \pm 0.3
 .XX \pm 0.2
 .XXX \pm
 AWG

焜倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION



AREA

REVISIONS

HK

DATE