
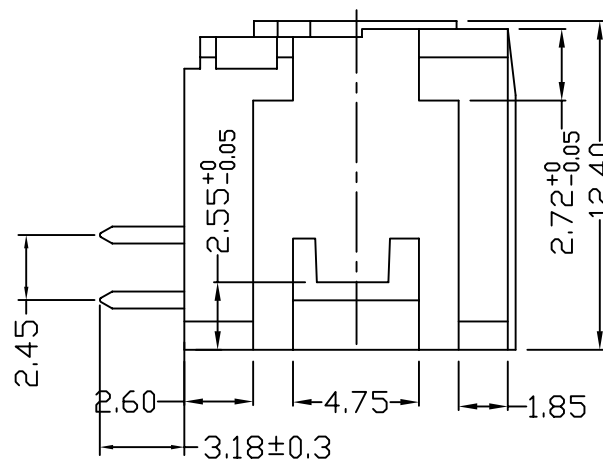


MATERIAL  
 INSULATOR: LCP UL94V-0  
 CONTACT: Phosphor bronze, Gold/Tin Plated

ENVIRONMENTAL  
 OPERATING TEMPERATURE: -55°C~105°C  
 ELECTRICAL  
 CONTACT CURRENT RATING: 1 Amp  
 DIELECTRIC WITHSTANDING : AC 1000V/min.R.M.S.  
 INSULATION RESISTANCE: 500M $\Omega$ min.at 500V DC  
 CONTACT RESISTANCE: 30m $\Omega$  Max

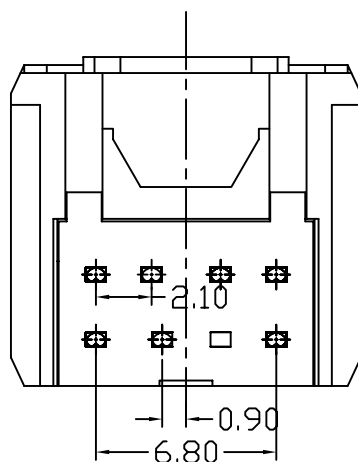

**MORETHANALL**  
 CONNECTORS  
 ASSEMBLIES

PART NO. MDJ-SLCP-07

DWG NO. MDJ-SLCP-07

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X  $\pm$  0.3

.XX  $\pm$  0.2

.XXX  $\pm$

AWG

DESCRIPTION: 迷你單層7P母半金黑無鐵殼半成品LCP無毒

AREA

REVISIONS

HK

DATE

焜倫股份有限公司