



MATERIAL
 INSULATOR: PBT UL94V-0
 CONTACT: Phosphor Bronze, Gold/Tin plated
 SHELL: Brass(0.3T), TIN PLATED
 ENVIRONMENTAL
 OPERATING TEMPERATURE: -55°~+105°
 ELECTRICAL
 CONTACT CURRENT RATING: 1 Amp
 DIELECTRIC WITHSTANDING : AC 1000V min. Per minute
 INSULATION RESISTANCE: 500M Ω min.at 500V DC
 CONTACT RESISTANCE: 30m Ω Max


Part No.	A COLOR	B COLOR	SHELL PLATING
MDJB1-F99-06	GREEN	PURPLE	TIN PLATED

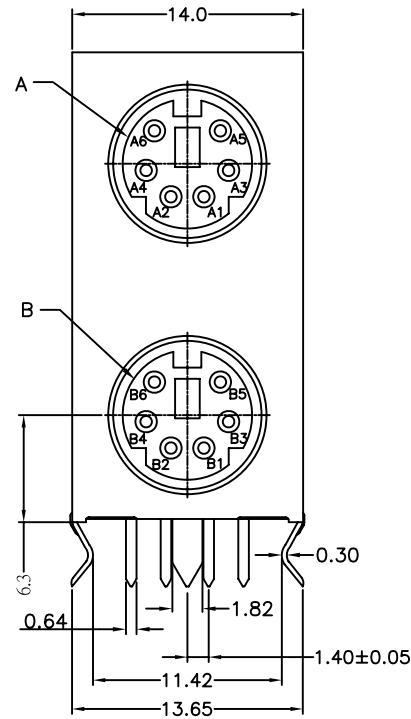


FRONT VIEW

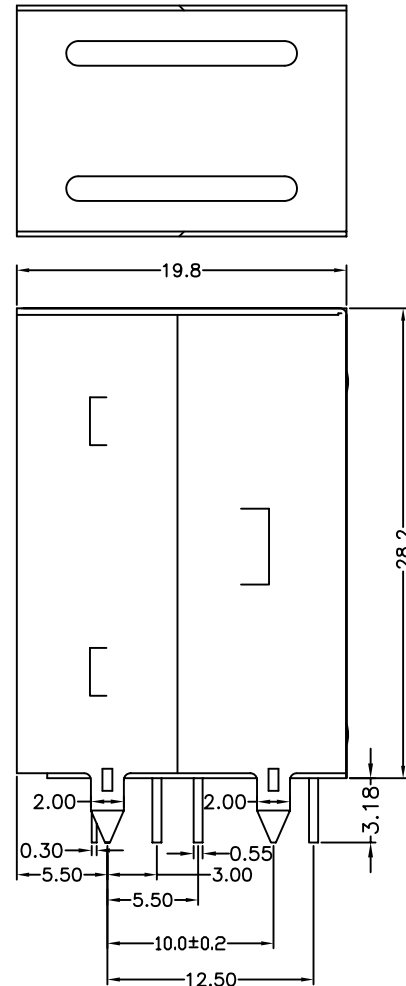

SIDE VIEW

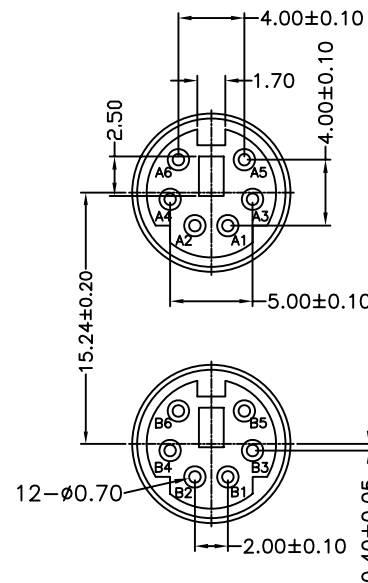

(Top View)

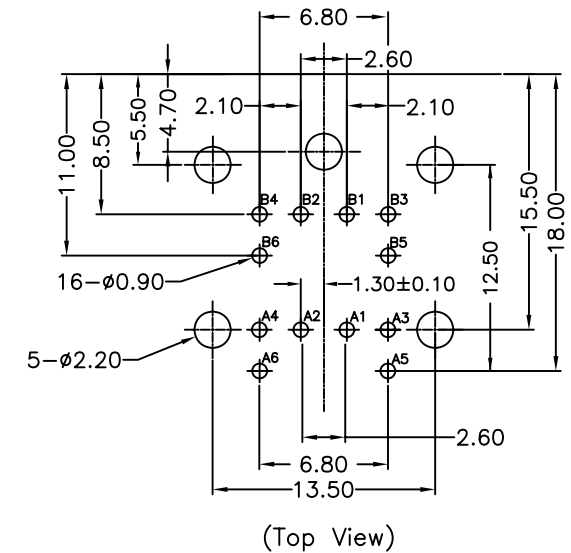

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
 .X, $\pm$
 .XX, $\pm$
 .XXX, $\pm$
 ANG, $\pm$



ORDER INFORMATION

MDJB1-F99-06-LF

SERIES | LEADFREE
 06 WAY
 PC99
 FEMALE

DESCRIPTION: 迷你雙層6P母半金綠+紫 鐵殼不加彈 鍍錫 無麥