




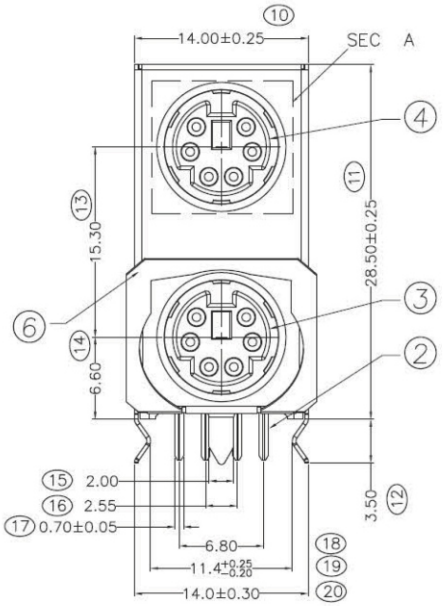


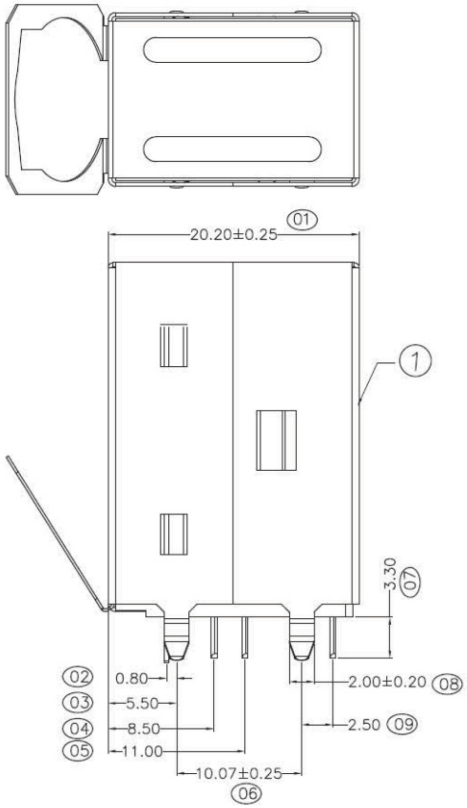

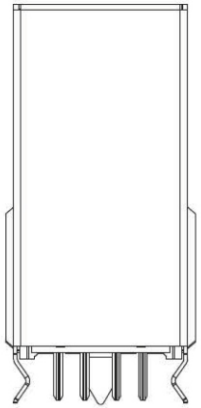



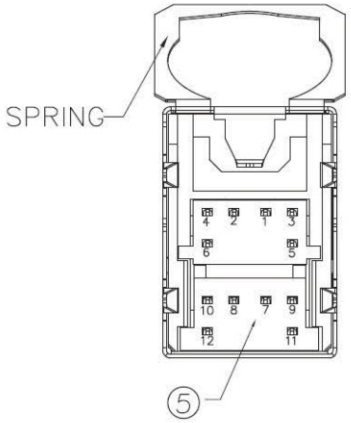

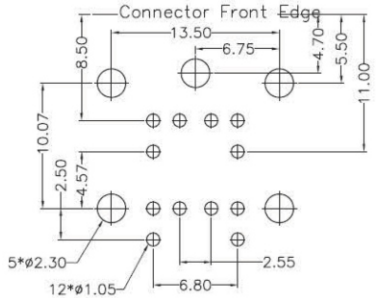

Printed Circuit Board (PCB) Layout

6	spring	SUS304-H T=0.20		
5	COVER	HIGH TEMPERATURE THERMOPLASTIC		BLACK
		TEMPERATURE THERMOPLASTIC		BLACK
4	MID-UPWARD	TEMPERATURE THERMOPLASTIC		GREEN
3	MID-DOWN	TEMPERATURE THERMOPLASTIC		PURPLE
2	CONTACT	COPPE RALLOY T=0.20	AXu" PLATING ON CONTACT AREA. 100u" MIN. Tin PLATING ON SOLDER TAIL AREA. 50u"MIN. NICKEL UNDERPLATING OVERALL.	
1	SHELL	SPCC-SD T=0.30	BRIGHT Tin 80u" Min OVER Ni 50u"Min	
			BRIGHT Tin 100u" Min OVER Ni 50u" Min	
	NAME	MATERIAL	PLATING	COLOR

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY	
CHECKED BY GENIUS	
UNIT / mm	SCALE 1 : 1
DATE	
SIZE A4	PPOJECTION

TOLERANCES ARE
X. ± 0.50
.X ± 0.30
.XX ± 0.10
.XXX ±
ANG ± 1°

照片框

ORDER INFORMATION

MDJB1-FS99-06L-LF
SERIES
SPRING
FULL METAL
LEADFREE
06WAY LOCK
PC 99 GREEN+PURPLE

DESCRIPTION: JACK雙層 MINI-DIN 6PIN有彈片