

備註 / NOTE:

1. 安規 / SAFETY:

- 1-1. 規格 / RATING: 100V AC MAX or 12V DC 2A MAX
- 1-2. 絕緣阻抗 / INSULATION RESISTANCE: 50M ohm MIN at 250V DC
- 1-3. 絕緣耐壓 / WITHSTANDING: 250V AC at 1 MINUTE

2. 材質 / MATERIAL:

- 2-1. 外套 / PLASTIC COVER: ABS
- 2-2. 銅管 / SHELL: 黃銅 / BRASS
- 2-3. 塑鋼單腳 / POM RING: POM
- 2-4. 膠芯 / HOUSING: PBT
- 2-5. 針 / PIN: 黃銅 / BRASS
- 2-6. 彈簧 / SPRING: 鋼 / STEEL
- 2-7. 後套 / METAL CAP: 黃銅 / BRASS

3. 電鍍 / PLATING:

- 3-1. 銅管 / SHELL: 鍍 / NICKEL
- 3-2. 針 / PIN: 表金 / Gold Flash
- 3-3. 彈簧 / SPRING: 鍍 / NICKEL
- 3-4. 後套 / METAL CAP: 錫 / TIN

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

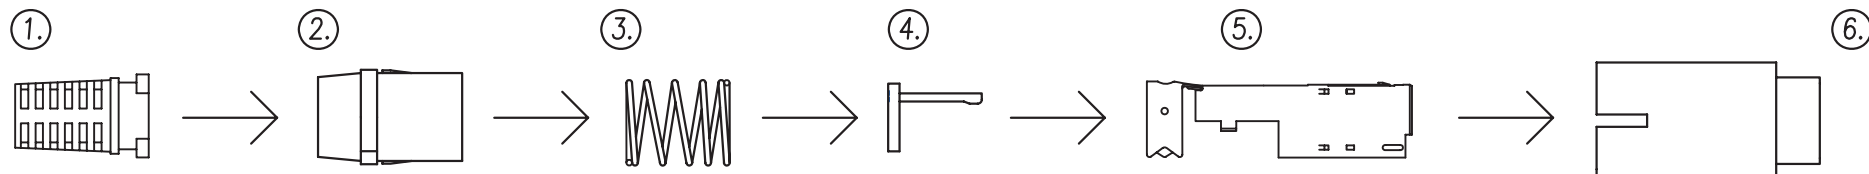
P PROJECTION

照片框



ORDER INFORMATION

MDL-P-06-LF
SERIES | LEADFREE
06 WAY
MALE

DESCRIPTION: LOCK 6P 威風(八件式)



- 1. MiniDin & Power SR(黑)(OD=6.5)
- 2. MiniDin Lock中筒(黑)
- 3. MiniDin Lock彈簧(10.6x12.7)
- 4. MiniDin Lock塑鋼單腳
- 5. MiniDin Lock銅管
- 6. MiniDin Lock后套—雙箭頭無印字(黑)
- 7. MiniDin Lock后套—雙箭頭無印字(黑)
- 8. MiniDin Lock銅管上蓋

	PART NO. MDL-P-06		CHECKED BY CY	TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± ANG	DESCRIP TION:			
	DWG NO. MDL-P-06							
焯倫股份有限公司	FILE NO.		PROJECTION 	AREA	REVISIONS	HK	DATE	
	UNIT / mm	SCALE 1:1						