

ELECTRICAL CHARACTERISTICS:

CONTACT CURRENT RATING: 1 AMPERES.
 DIELECTRIC WITHSTANDING VOLTAGE: AC 500V R.M.S
 INSULATION RESISTANCE: 500 MEGOHMS MINIMUM AT DC 500V.
 CONTACT RESISTANCE: 30 MILLIOHMS MAXIMUM.
 OPERATING TEMPERATURE: -55°C TO +105°C.

MECHANICAL CHARACTERISTICS:


CONTACT INSERTION FORCE: 6.0 KG MAXIMUM.
 CONTACT SEPARATION FORCE: 1.0 KG MINIMUM.

MATERIALS:

CONTACT: BRASS.
 INSULATOR: P.B.T. UL 94-V0 RATED.
 SHELL: BRASS.

FINISHES:

CONTACTA:TIN FLASH OR GOLD FLASH 1U",3U",5U",10U",15U",30U".
 SHELL:NICKEL OR GOLD PLATED.

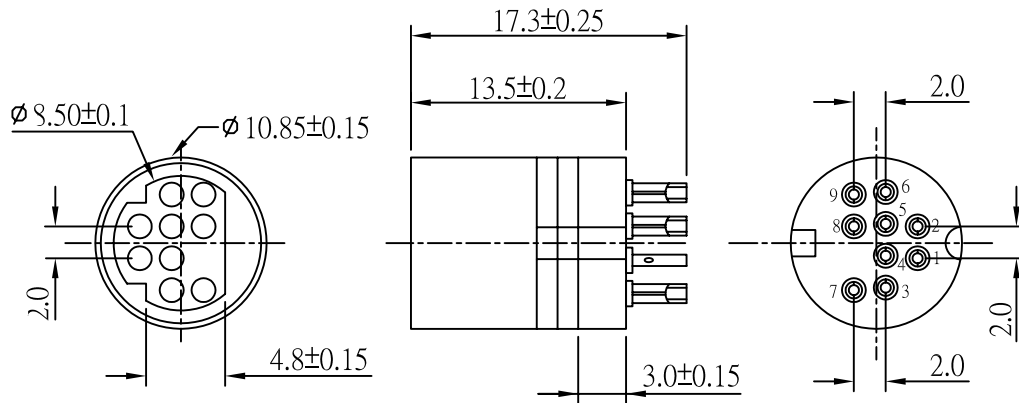

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PJECTION

X. \pm
 .X \pm
 .XX \pm
 .XXX \pm
 ANG \pm

照片框

ORDER INFORMATION

MDM-S-09-LF
 SERIES | T LEADFREE
 09 WAY
 FEMALE

DESCRIPTION: MINI DIN SOLDER 9PIN TYPE(F)