

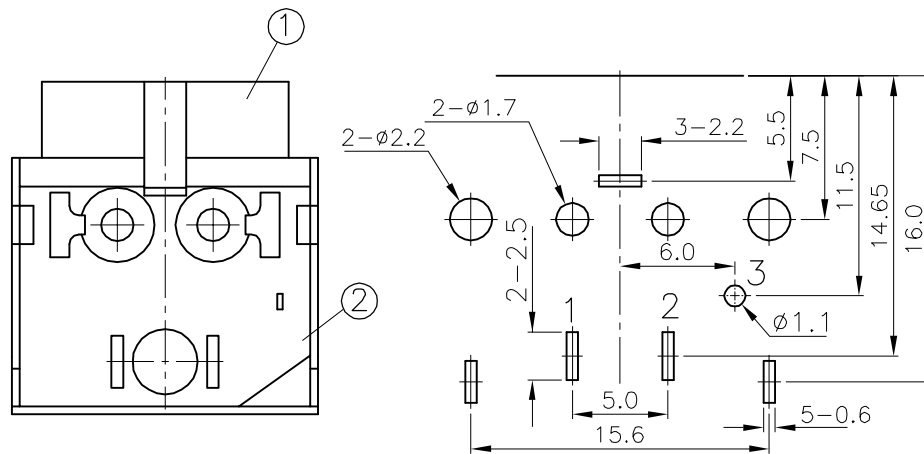


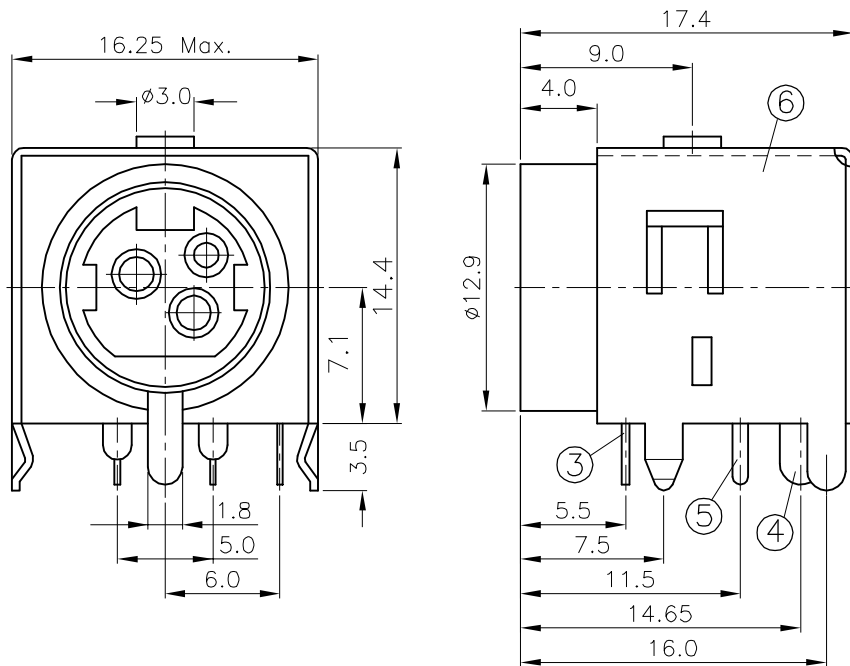

HOLE LAYOUT
BOTTOM VIEW

SPECIFICATIONS:

- CURRENT CARRYING CAPACITY : PIN NO. A & B : 20 VDC 7.5A MAX .
PIN NO. C : 20 VDC 1A MAX .
- DIELECTRIC STRENGTH : A POTENTIAL OF 250V RMS , 50/60 HZ SHALL BE APPLIED BETWEEN ANY OPEN CONTACTS , FOR 1 MINUTE , WITHOUT BREAKDOWN .
- INSULATION RESISTANCE : BEFORE ANY ENVIRONMENTAL TEST : 50 MOHM MIN . @250 VDC
AFTER ANY ENVIRONMENTAL TEST : 5 MOHM MIN . @250 VDC
- CONTACT RESISTANCE : BEFORE ANY TEST
PIN TO CNTACTOR NO. A,B&C : 30mOHM MAX . @20 mA ,1 KHZ
AFTER PERFORMANCE LIFE TEST
PIN TO CNTACTOR NO. A&B : 60mOHM MAX . @20 mA ,1 KHZ
PIN TO CNTACTOR NO. C : 100mOHM MAX . @20 mA ,1 KHZ
- INSERTION FORCE AND WITHDRAWAL FORCE : INSERTION FORCE : 6.0KG MAX .
WITHDRAWAL FORCE : 0.5 - 6.0 KG
- PERFORMANCE TEST (NO LOAD CONDITION) : SOCKETS SHALL BE SUBJECT TO 1,000 CYCLES, AT THE RATE OF 10 TO 20 CYCLES PER MINUTE .
- UNLESS OTHER SPECIFIC,TOLERANCE IS ± 0.2



6.	SHIELD	1	SPCC 0.45 t	TIN	
5.	C. TERMINAL	1	PBR-H 0.2t	TIN	
4.	A. B. TERMINAL	2	BSR-H 0.3t	TIN	
3.	EARTH TERMINAL	1	BSR-H 0.4t	TIN	
2.	COVER	1	P.B.T.		UL94V-0
1.	BODY	1	P.B.T.		UL94V-0
P/N	PART NAME	Q'TY	MATERIAL	PLATING	REMARKS

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
X $\pm$ 0.30
.XX $\pm$ 0.20
.XXX $\pm$ 0.10
ANG $\pm$ 1°

PPOJECTION

照片框

ORDER INFORMATION

MDP-JRMKM-03-LF
SERIES | | | | LEADFREE
| | | | 03 WAY
| | | | KINK+METAL
| | | | M TYPE
| | | | DIP 90°
| | | | JACK

DESCRIPTION: