

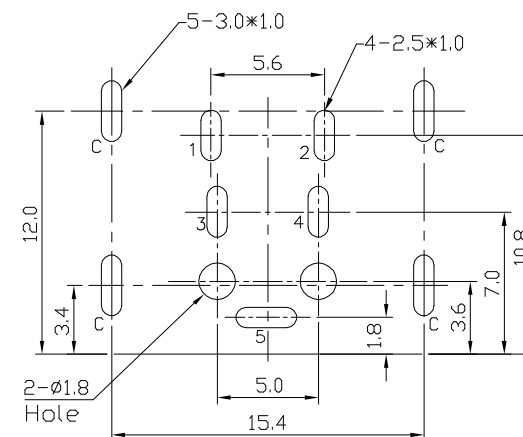
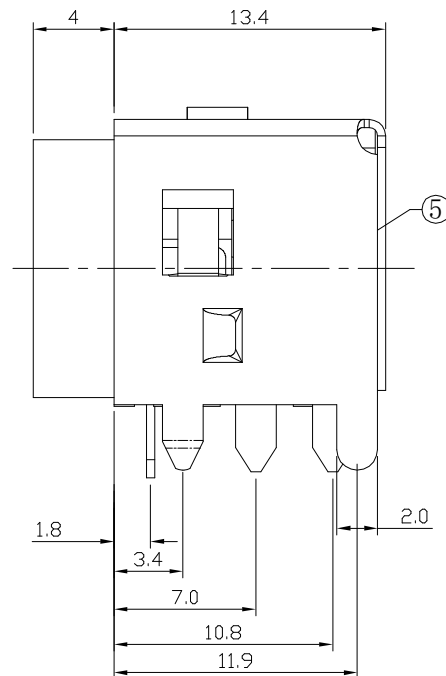
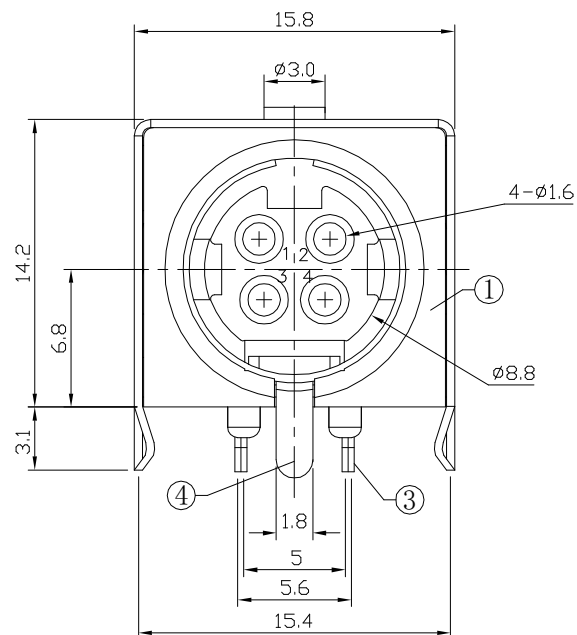


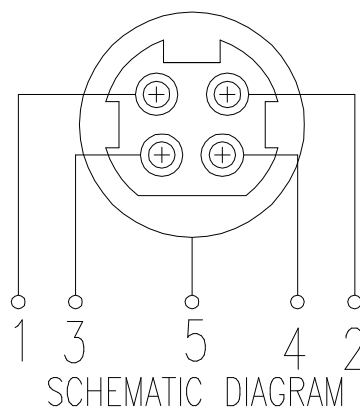

T:1.6 Dimensions of PC board holes
Tolerance : ± 0.05 (Printed-Top view)

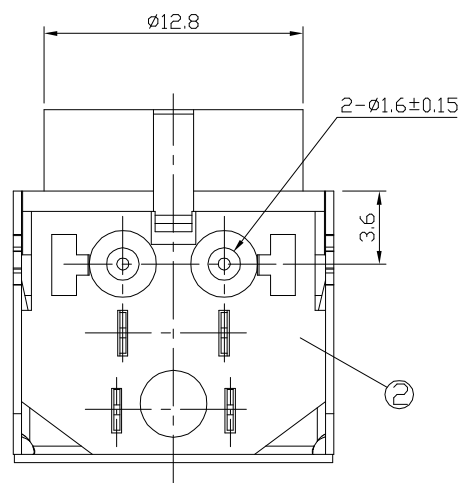

5	COAT	1	SPCC	t=0.4	Cu/Sn	PLATED
4	GROUND CONTACT	1	C2680	t=0.35	Cu/Sn	PLATED
3	TERMINAL	4	C2680	t=0.3	Ag	PLATED
2	COVER	1	PBT		UL-94V0(BLACK)	
1	HOUSING	1	PBT		UL-94V0(BLACK)	
LTR	PART NAME	QTY	MATERIAL		REMARK	

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.3

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$

.X, $\pm$

.XX, $\pm$

.XXX, $\pm$

ANG, $\pm$

PPOJECTION

照片框

ORDER INFORMATION

MDP-JRMKM-04-LF

SERIES LEADFREE
04 WAY
KINK+METAL
M TYPE
DIP 90°
JACK

DESCRIPTION: POWER JACK QUICK LOCK