

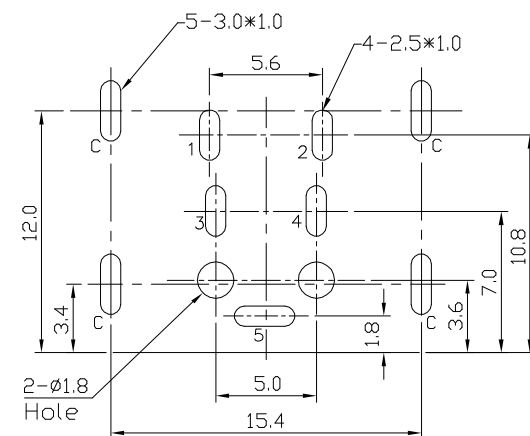
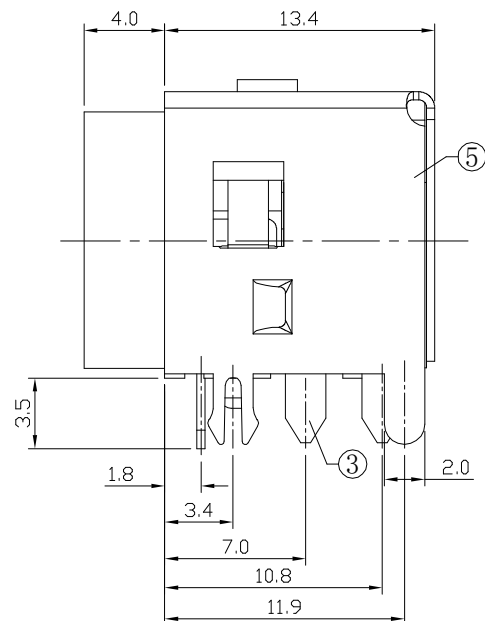
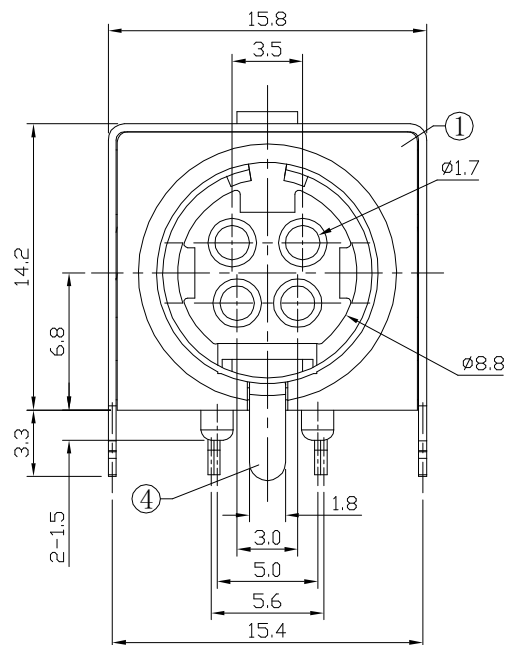


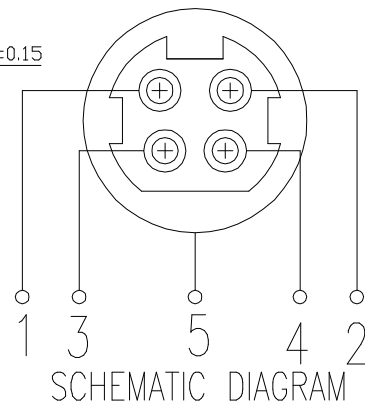

T:1.6 Dimensions of PC board holes  
Tolerance :  $\pm 0.05$  (Printed-Top view)

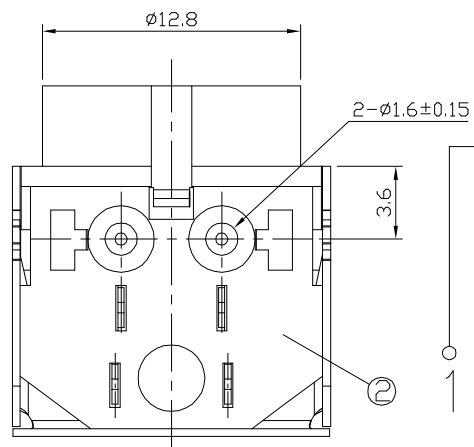

|     |                |     |          |        |                |        |
|-----|----------------|-----|----------|--------|----------------|--------|
| 5   | COAT           | 1   | SPCC     | t=0.4  | Cu/Sn          | PLATED |
| 4   | GROUND CONTACT | 1   | C2680    | t=0.4  | Cu/Sn          | PLATED |
| 3   | TERMINAL       | 4   | C2680    | t=0.3  | Ag             | PLATED |
| 2   | COVER          | 1   | PBT      |        | UL-94V0(BLACK) |        |
| 1   | HOUSING        | 1   | PBT      |        | UL-94V0(BLACK) |        |
| LTR | PART NAME      | QTY | MATERIAL | REMARK |                |        |

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL:  $\pm 0.3$

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X,  $\pm$

.X,  $\pm$

.XX,  $\pm$

.XXX,  $\pm$

ANG,  $\pm$

PPOJECTION

照片框

ORDER INFORMATION

MDP-JRMZM-04-LF

SERIES LEADFREE  
04 WAY  
CILP+METAL  
M TYPE  
DIP 90°  
JACK

DESCRIPTION: POWER JACK QUICK LOCK