


T:1.6 Dimensions of PC board holes
Tolerance : ±0.05(Printed-Top view)

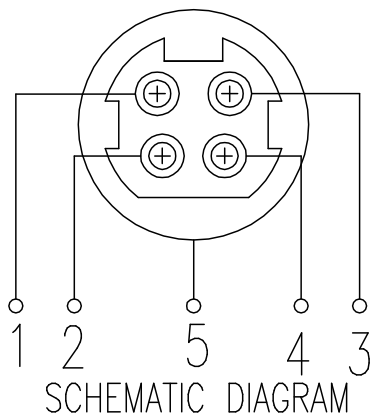

4	GROUND CONTACT	1	C2680	t=0.35	Cu/Sn PLATED
3	TERMINAL	4	C2680	t=0.3	Ni / Ag PLATED
2	COAT	1	PBT 4815		UL-94V0(BLACK)
1	HOUSING	1	PBT 4815		UL-94V0(BLACK)
LTR	PART NAME	QTY	MATERIAL		REMARK

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ±0.3

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X.±

CHECKED BY GENIUS

.X±

UNIT / mm

SCALE 1 : 1

.XX±

DATE

.XXX±

ANG±

SIZE A4

PJECTION

照片框

ORDER INFORMATION

MDP-JRS-04-LF
SERIES | | | LEADFREE
| | | 04WAY
| | | PLASTIC BODY
| | | DIP 90°
| | | JACK

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: POWER JACK QUICK LOCK