

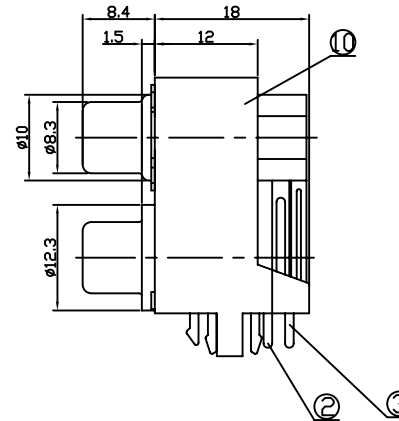
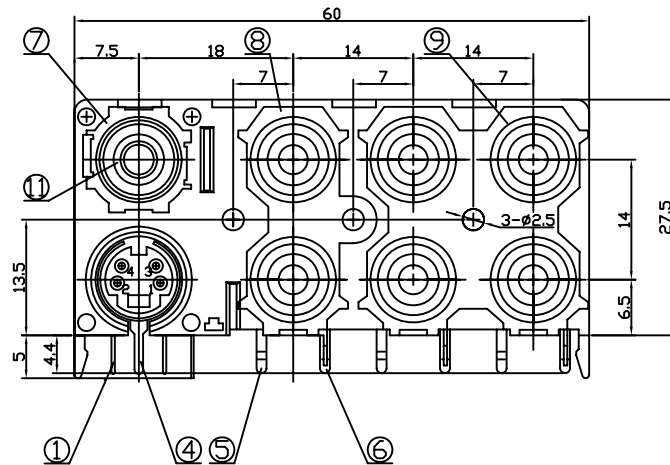


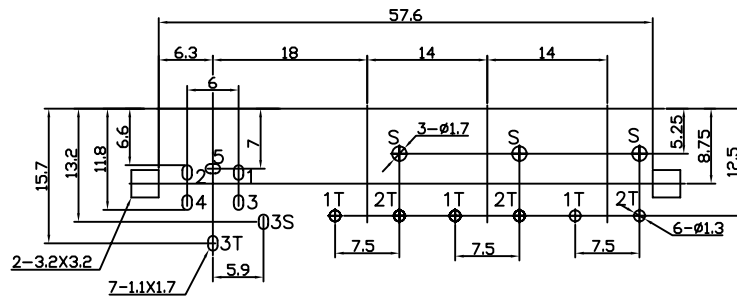

SCHEMATIC				
TYPE	A	B	C	D
	X	E	F	G
COLOR				

SCHEMATIC			
S JACK	PIN JACK		

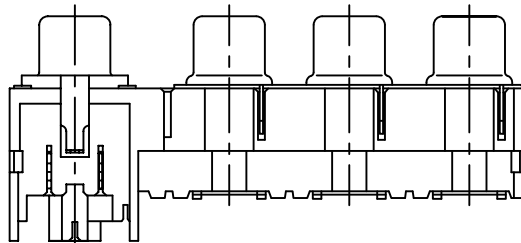

T:1.6 Dimension of PC board holes
Tolerance : ± 0.1 (Printed-bottom View)

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.3

11	WASHER	7	ABS	
10	HOUSING	1	ABS	
9	OUTER CONTACT (4P)	1	H62y t=0.4	MB:Cu Ni PLATED
8	OUTER CONTACT (2P)	1	H62y t=0.4	MB:Cu Ni PLATED
7	OUTER CONTACT (1P)	1	H62y t=0.4	MB:Cu Ni PLATED
6	TERMINAL	3	QSn6.5-0.1y t=0.4	MB:Cu Cu/Sn PLATED
5	TERMINAL	3	QSn6.5-0.1y t=0.4	MB:Cu Cu/Sn PLATED
4	GROUND CONTACT	1	H62y t=0.35	MB:Cu Ni PLATED
3	TERMINAL	1	H62y t=0.5	MB:Cu Cu/Sn PLATED
2	TERMINAL	1	H62y t=0.35	MB:Cu Cu/Sn PLATED
1	TERMINAL	4	QSn6.5-0.1y t=0.4	MB:Cu Cu/Sn PLATED
LTR	PART NAME	QTY	MATERIAL(THICK,COLOR)	REMARK

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

MDRCB4-FR-0409-LF

SERIES

LEADFREE

04 TO 09 WAY

DIP 90°
FEMALE

DESCRIPTION: PIN JACK