


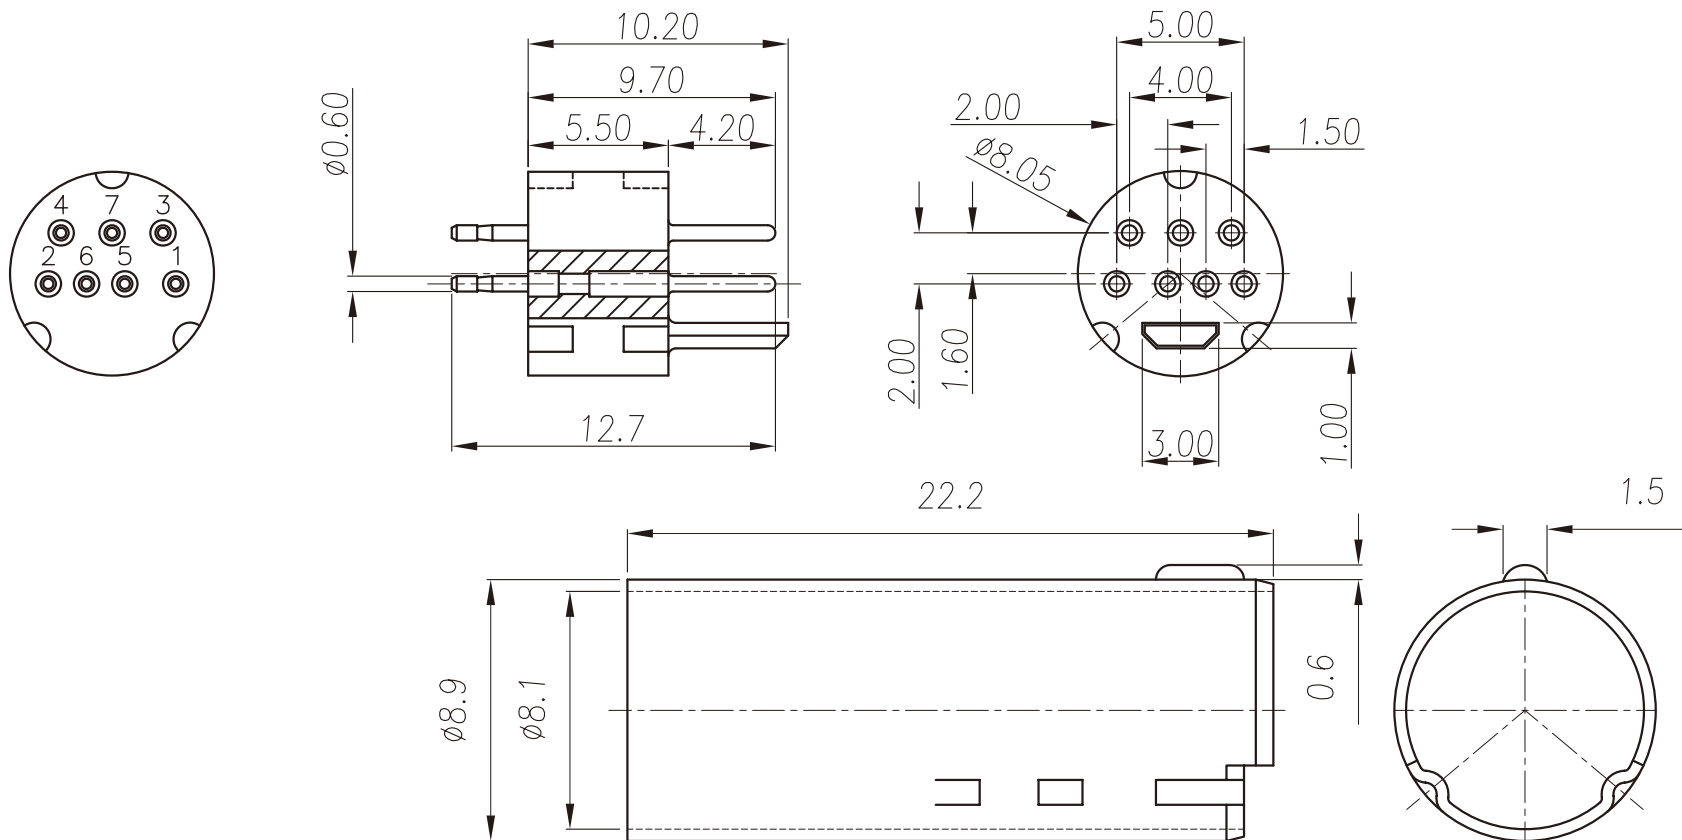

備註 /NOTE:

1. 安規 /SAFETY:
 - 1-1. 規格 /RATING: 100V AC MAX or 12V DC 2A MAX
 - 1-2. 絕緣阻抗 /INSULATION RESISTANCE: 50MΩ MIN at 250V DC
 - 1-3. 絕緣耐壓 /WITHSTANDING: 250V AC at 1 MINUTE
2. 材質 /MATERIAL:
 - 2-1. 膠芯 /HOUSING: PBT+30%GF(黑色 /BLACK)
 - 2-2. 針 /PIN: 黃銅 /BRASS
3. 電鍍 /PLATING:
 - 3-1. 針 /PIN: 表金 /GOLD FLASH
 - 3-2. 銅管 /BRASS: 鍍135u" /NICKEL 135u"
4. 拉拔力 /STRENGTH:
 - 4-1. 總合拉拔力 /PULL STRENGTH: 與 AMP 母座配合拉拔力為 0.9KGF MIN

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

MDS-PL-07B-LF

SERIES

LEADFREE

07WAY / B TYPE

LONG

MALE

DESCRIPTION: MD 7P 雙排 (表金)M+ 銅管(鍍)