


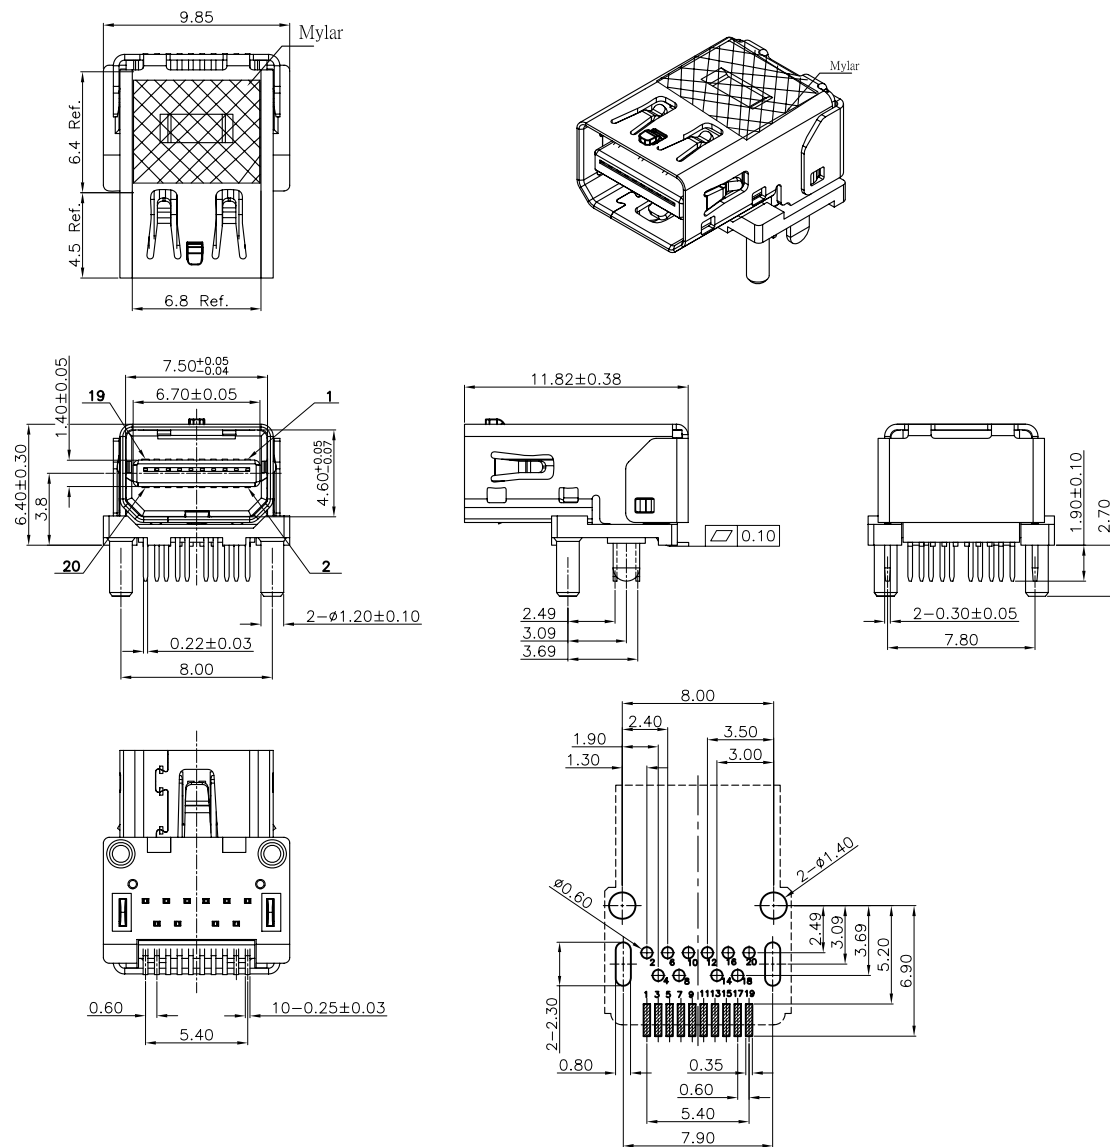

RECOMMENDED PCB LAYOUT
TOLERANCE: ± 0.05

MATERIALS

1. HOUSING : LCP, (UL 94V-0) BLACK.
2. TERMINAL : COPPER ALLOY (T=0.20mm)
PLATING: SELECTIVE GOLD FLASH ON CONTACT AREA,
TIN PLATED ON SOLDER TAILS,
NICKEL UNDER PLATED OVERALL.
3. SHELL : STAINLESS STEEL (T=0.30mm)
PLATING: NICKEL PLATED OVERALL.
4. COVER: LCP, (UL 94V-0) BLACK.

SPECIFICATION

1. CURRENT RATING : 0.5A MAX
2. CONTACT RESISTANCE : 30mΩ MAX.
3. DIELECTRIC WITHSTANDING VOLTAGE :
500V AC R.M.S. FOR ONE MINUTE.
4. INSULATION RESISTANCE : 100MΩ MIN AT 500V DC.
5. OPERATING TEMPERATURE : -25°C TO +85°C.
6. DURABILITY : 10000 CYCLES.
7. MATING FORCE : 4.5Kgf MAX.
8. UNMATING FORCE : 1.0Kgf~4.0Kgf.

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X. ± 0.40

CHECKED BY GENIUS

.X. ± 0.30

UNIT / mm

SCALE 1 : 1

.XXX $\pm$

ANG $\pm 2^\circ$

DATE

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

MDSP-SRW38PMC-20-LF

SERIES LEADFREE
20WAY
FEMALE MYLAR
DIP 90° METAL FOOT
90°SMT POST
3.8mm

DESCRIPTION: MINI DP20PIN F DIP+SMT 3.8MM TYPE 上盖带凸点贴麦拉CO

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com