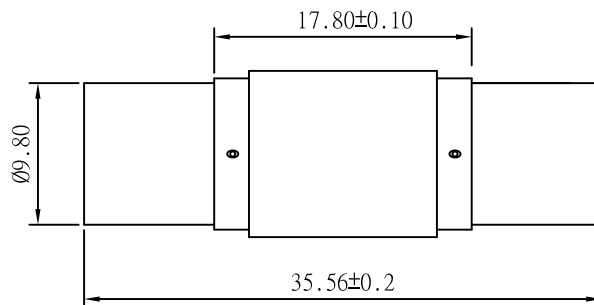



PIN ASSIGNMENT

MINIDIN	MINIDIN
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
G	G

- NOTE: 1. BRASS CONTACTS ARE GOLD PLATED OVER NICKEL.
 2. THE INSULATOR IS GLASS-FILLED PBT, UL-94V0.
 3. THE HOUSING NICKEL PLATED.
 4. ALL-METAL CONSTRUCTION PROVIDES 100% SHIELDING.
 5. UL Style: E8J934

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MDX2-FS-0808-LF

SERIES

LEADFREE

08 TO 08 WAY

FEMALE TO FEMALE

DESCRIPTION: