

Dimension:

POLES	Dim. A	Dim. B	Dim. C	Dim. D
6	4.00	7.10	11.20	5.00
8	6.00	9.10	13.20	7.00
10	8.00	11.10	15.20	9.00
12	10.00	13.10	17.20	11.00
14	12.00	15.10	19.20	13.00
16	14.00	17.10	21.20	15.00
18	16.00	19.10	23.20	17.00
20	18.00	21.10	25.20	19.00
22	20.00	23.10	27.20	21.00
24	22.00	25.10	29.20	23.00
26	24.00	27.10	31.20	25.00
28	26.00	29.10	33.20	27.00
30	28.00	31.10	35.20	29.00
32	30.00	33.10	37.20	31.00
34	32.00	35.10	39.20	33.00
36	34.00	37.10	41.20	35.00
40	38.00	41.10	45.20	39.00
44	42.00	45.10	49.20	43.00
50	48.00	51.10	55.20	49.00
60	58.00	61.10	65.20	59.00
64	62.00	65.10	69.20	63.00
68	66.00	69.10	73.20	67.00

**Specification**

**Current Rating : 1A**

**Contact Resistance : 20mΩ Max**

**Insulation Resistance : 1000MΩ Min.at 500V DC**

**Dielectric Withstanding Voltage: 500V AC for 1 Minute**

**Operation Temperature : -55℃ ~ +105℃**

**Material**

**Insulator : P.B.T+30% Glass Fiber(UL94V-0)**

**Contact : Phosphor Bronze or Brass**

**Contact Plated : Gold over Nickel or Tin**

**RoHS Compliant**

TOLERANCES ARE

DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X ±

UNIT / mm

SCALE 1 : 1

.XX ±

DATE

.XXX ±


ANG ±

SIZE A4

PJECTION

照片框

ORDER INFORMATION

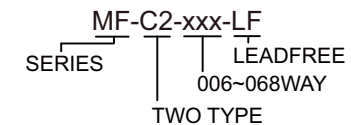

DESCRIPTION:

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com