


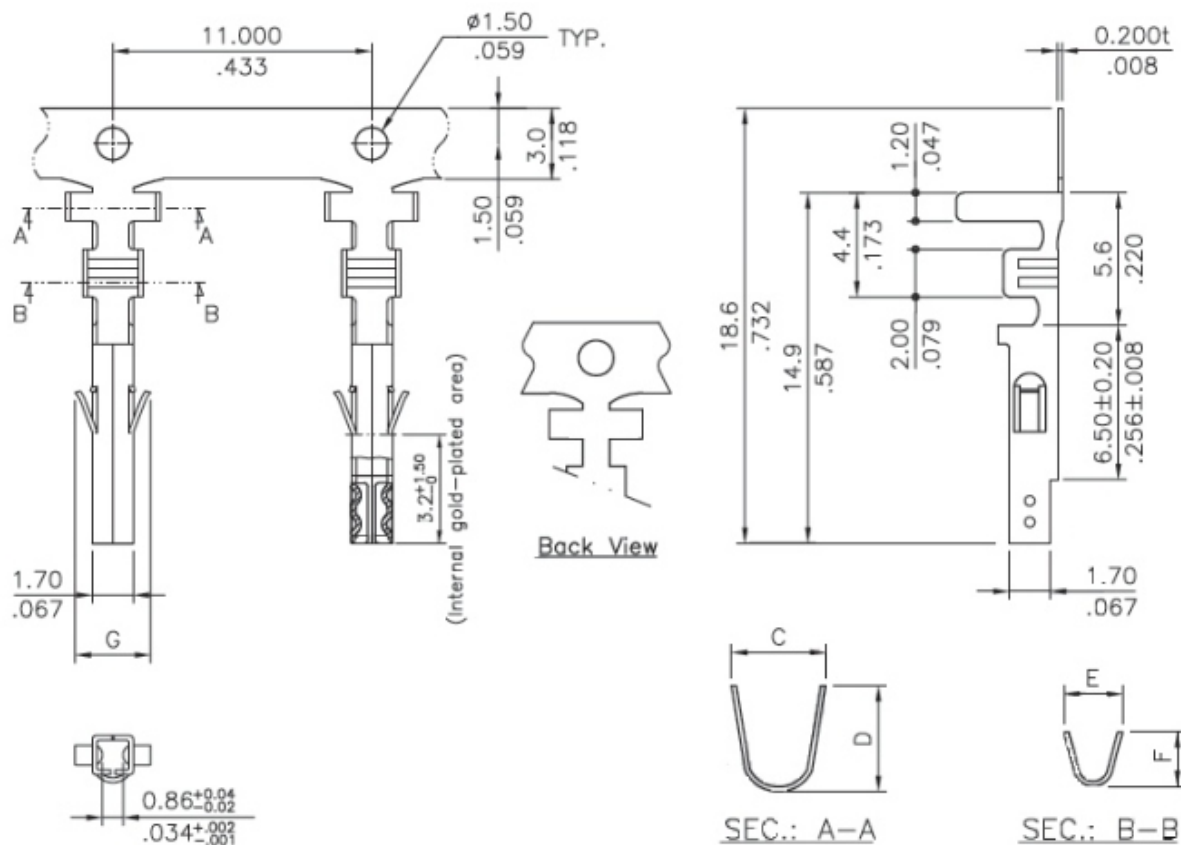

NOTES:

- * INSERTION FORCE: MAX. 700 Gram
(INSERTION INTO 1.14MM SQUARE PIN)
- * WITHDRAWAL FORCE: MIN. 100 Gram
(PUSH TERMINAL FROM 1.14MM SQUARE PIN)

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

MF-FTxx-xx-LF

SERIES: FEMALE TERMINAL

16:16 AWG
18:18~22 AWG
22:22~26 AWG

LEADFREE

BLANK:TIN/PLATE
GP:GOLD/PH.B.
GB:GOLD/BRASS

DESCRIPTION: