

Features:

- 3 ~ 12 circuits available
- Pin material: Tin-plated brass
- Recommended PCB thickness: .070"(1.78mm) Max.
- Material: UL 94V-2 nylon 66 or UL 94V-0 nylon 66

Specification:

- Current rating: (Used with #18 AWG)



Circuits	2 ~ 3	4 ~ 6	7 ~ 10	11 ~ 12
Ampere	9 A	8 A	7 A	6 A

- Voltage rating: 600V (R.M.S.)
- Contact resistance: 10mΩ Max.
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -40°C ~ 105°C

Dimensional Information (mm)

Circuits	Dim. A	Dim. B
N	4.2 x (N - 1)	4.2 x N + 1.2

&& N = 3 ~ 12

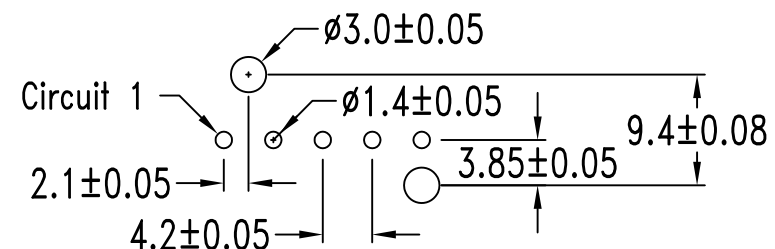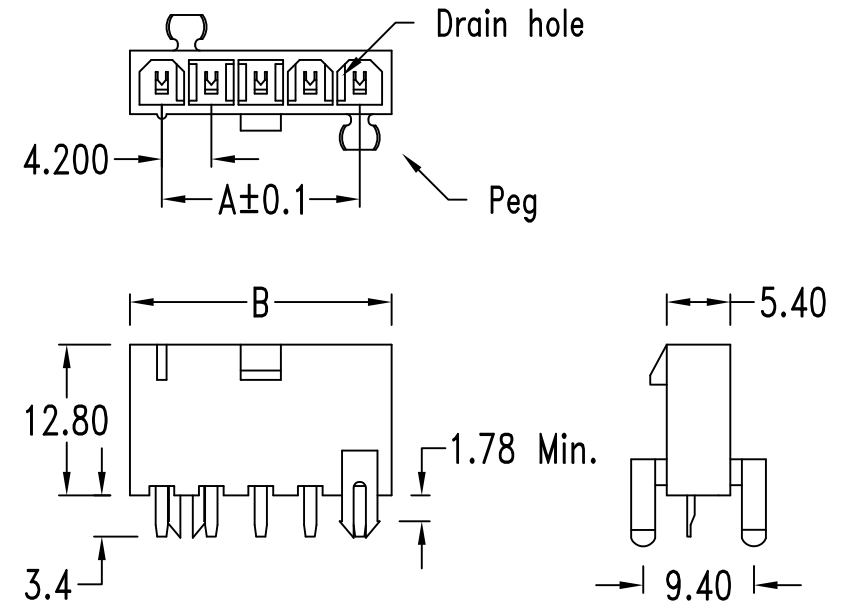

P.C.B. hole dimensions

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X. ±
.X ± 0.40
.XX ± 0.25
.XXX ± 0.08
ANG ±

照片框

ORDER INFORMATION

MF-PDP-1Xxx-LF
SERIES
LEADFREE
1X03:03WAY
1X12:12WAY
POST
DIP 180°
MALE

DESCRIPTION: