

Features:

- 2 ~ 24 circuits available
- Material: UL 94V-2 nylon 66
- Contact material: Brass

Specifications:

- Current rating & wire size:




Wire Size AWG	Rated Voltage	Circuits			
		2	4 ~ 6	8 ~ 10	12 ~ 24
#18	250V	9A	8A	7A	6A
#20		7A	6A	5A	5A
#22		5A	4A	4A	4A
#24		4A	3A	3A	3A

- Voltage rating: 600V AC, DC (R.M.S.)
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -40°C ~ 105°C
(Including temperature range)

Dimensional Information (mm)

Circuits	Dim. A	Dim. B
N	2.1 x N - 4.2	2.1 x N + 1.2

&& N = 2 ~ 24

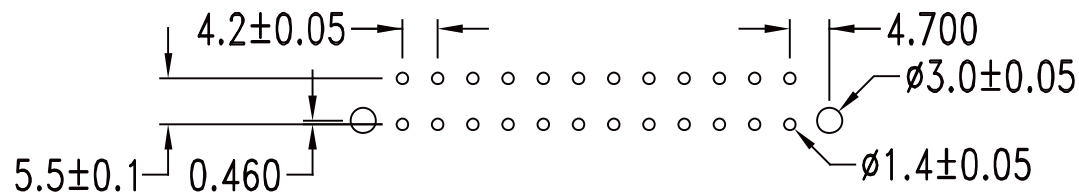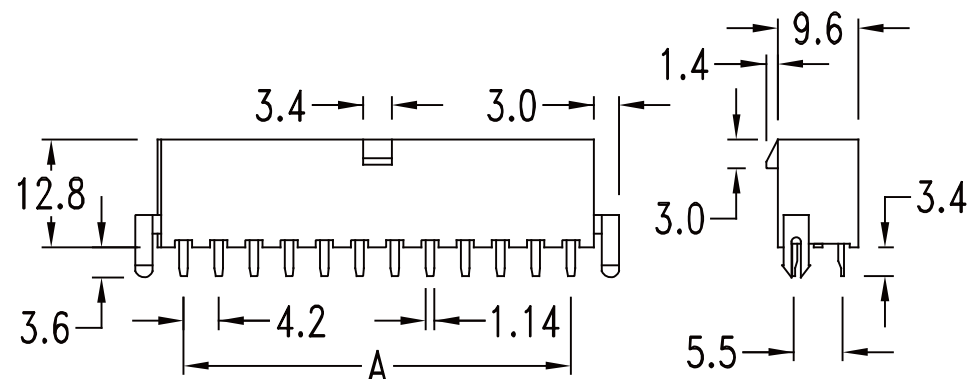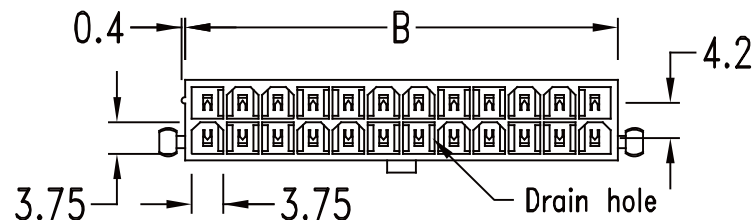

Recommended P. C. board layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.40
.XX ± 0.25
.XXX ± 0.08
ANG ±

照片框

ORDER INFORMATION

MF-PDP-2Xxx-LF
SERIES
LEADFREE
2X02:04WAY
2X12:24WAY
POST
DIP 180°
MALE

DESCRIPTION: