

Features:


- 2 ~ 12 circuits available
- Material: UL 94V-2 nylon

Specification:

- Current rating and wire size:

Wire Size AWG	Circuits			
	2, 3	4 ~ 6	7 ~ 10	11, 12
# 16	9 A	8 A	7 A	6 A
# 18	9 A	8 A	7 A	6 A
# 20	7 A	6 A	5 A	5 A
# 22	5 A	4 A	4 A	4 A
# 24	4 A	3 A	3 A	3 A
# 26	3 A	2 A	2 A	2 A
# 28	2 A	1 A	1 A	1 A

- Voltage rating: 600V (R.M.S.)
- Insulation resistance: DC 500V 1000M Ω min.
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range:
-40°C ~ 105°C
(Including temperature rise)

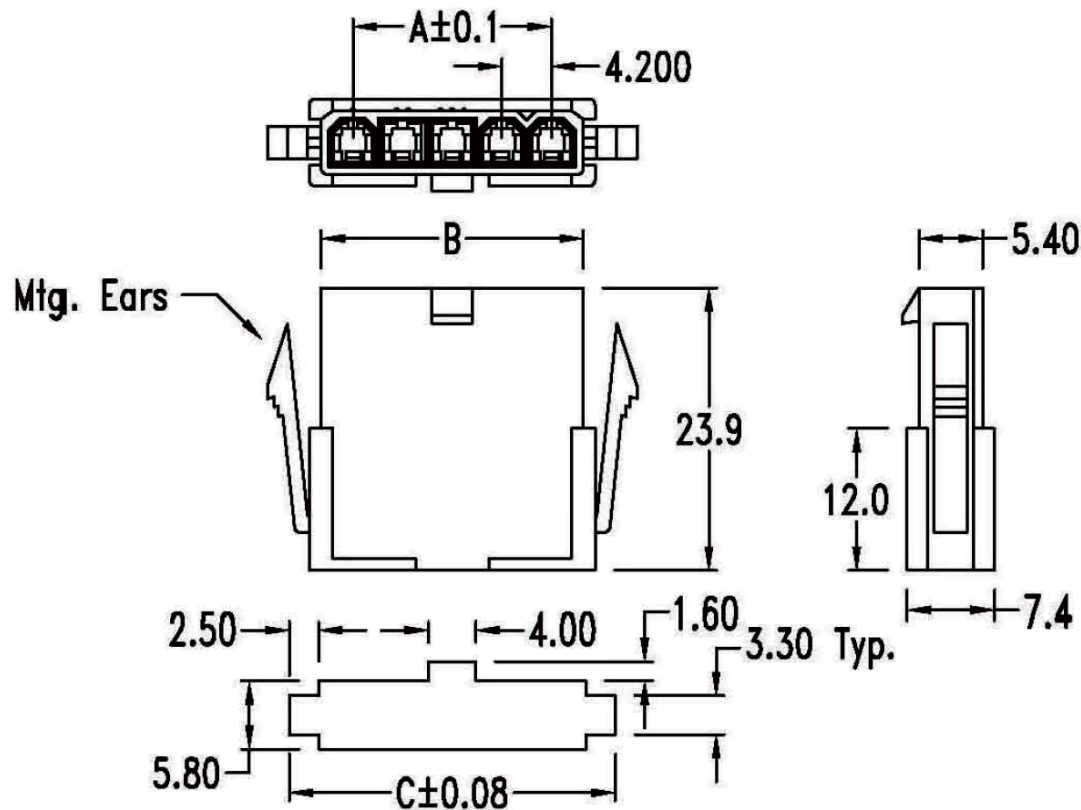

PANEL CUTOUT [Max. panel thickness: .079" (2.0mm)]

Dimensional Information (mm)

Circuits	Dim. A	Dim. B	Dim. C
N	$4.2 \times (N - 1)$	$4.2 \times N + 1.2$	$4.2 \times N + 6.6$

&& N = 2 ~ 12

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

P PROJECTION

X, \pm
.X \pm 0.40
.XX \pm 0.25
.XXX \pm 0.08
ANG \pm

照片框

ORDER INFORMATION

MF-PH-1Xxx-LF
SERIES | LEADFREE
1X02:02WAY
1X12:12WAY
HOUSING
MALE

DESCRIPTION: