

Features:


- 2 ~ 24 circuits available
- 600V volts rating (R.M.S.)
- Current rating up to 9 amperes per circuits
- Positive housing locks
- Max. panel thickness: 2.54mm
- Material UL 94V-0

Specification:

- Current rating and wire size:

Wire Size AWG	Circuits			
	2	4, 6	8, 10	12~24
# 18	9 A	8 A	7 A	6 A
# 20	7 A	6 A	5 A	5 A
# 22	5 A	4 A	4 A	4 A
# 24	4 A	3 A	3 A	3 A

- Voltage rating: 600V AC, DC
- Insulation resistance: DC 500V 1000MΩ min.
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -25°C ~ 85°C
(including temperature rise)

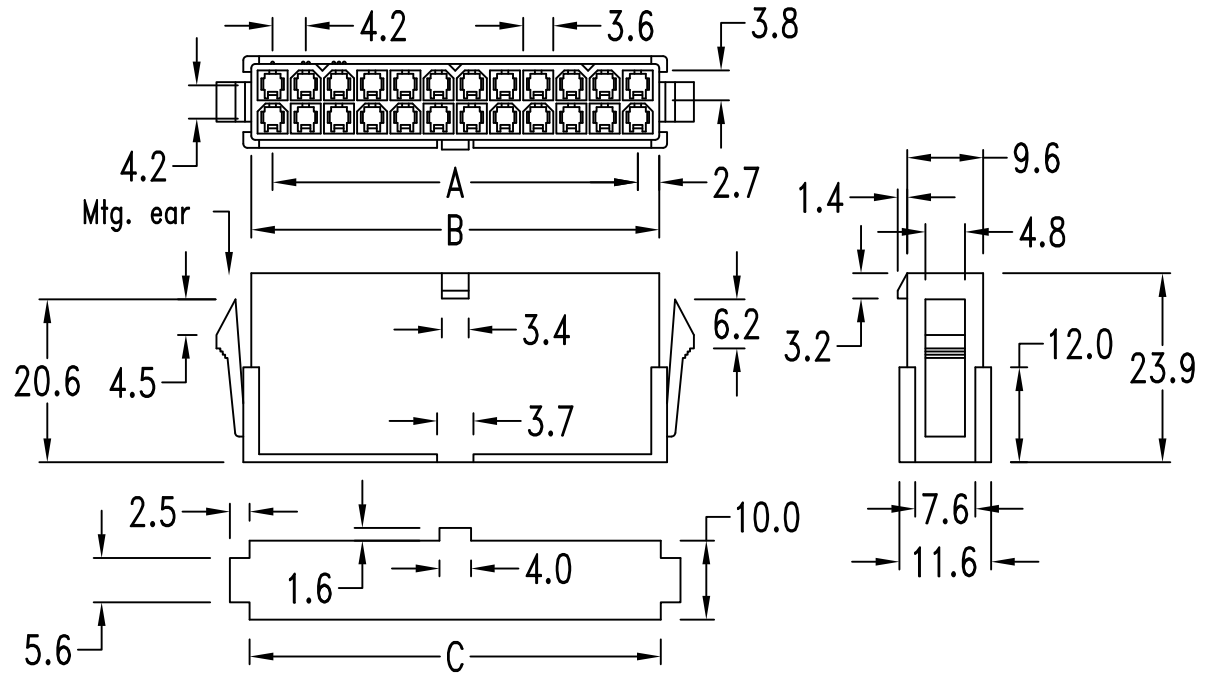

Dimensional Information (mm)

Circuits	Dim. A	Dim. B	Dim. C	Circuits	Dim. A	Dim. B	Dim. C
2		5.6	5.8	14	25.2	30.8	31.0
4	4.2	9.8	10.0	16	29.4	35.0	35.2
6	8.4	14.0	14.2	18	33.6	39.2	39.4
8	12.6	18.2	18.4	20	37.8	43.4	43.6
10	16.8	22.4	22.6	22	42.0	47.6	47.8
12	21.0	26.6	26.8	24	46.2	51.8	52.0

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ± 0.40
.XX ± 0.25
.XXX ± 0.08
ANG ±


照片框

ORDER INFORMATION


MF-PHVO-2Xxx-LF
SERIES | LEADFREE
2X01:02WAY
2X24:12WAY
UL 94V0
HOUSING
MALE

DESCRIPTION:


2P




4P




6P




8P




10P




12P




14P




16P




18P




20P



22P



24P



RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.40
.XX ± 0.25
.XXX ± 0.08
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MF-PHV0-2Xxx-LF
SERIES | LEADFREE
2X01:02WAY
2X24:12WAY
UL 94V0
HOUSING
MALE

DESCRIPTION: