

## Features:

- 2 ~ 6 circuits available
- Material: UL 94V-2 nylon




## Specification:

- Current rating: ( Used with #18 AWG )

Circuits	2 ~ 3	4 ~ 6
Ampere	9	8

- Voltage rating: 600V ( R.M.S. )
- Insulation resistance: DC 500V 1000M $\Omega$  min.
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -40°C ~ 105°C

( Including temperature rise )

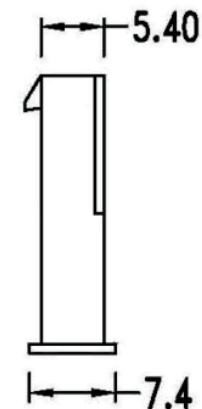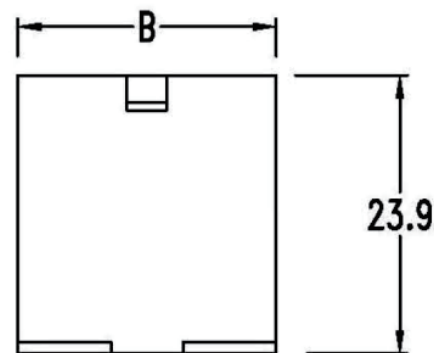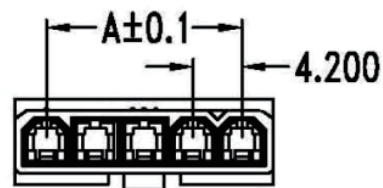

## Dimensional Information ( mm )

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2	4.2	9.6	4	12.6	18.0	6	21.0	26.4
3	8.4	13.8	5	16.8	22.2			

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT/ mm SCALE 1:1

DATE


SIZE A4

P PROJECTION

X,  $\pm$   
.X,  $\pm$   
.XX,  $\pm$   
.XXX,  $\pm$   
ANG,  $\pm$



ORDER INFORMATION

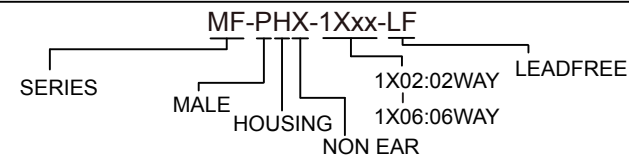

DESCRIPTION: