

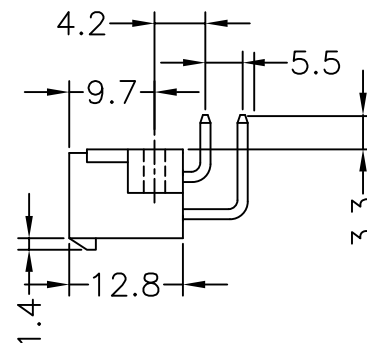
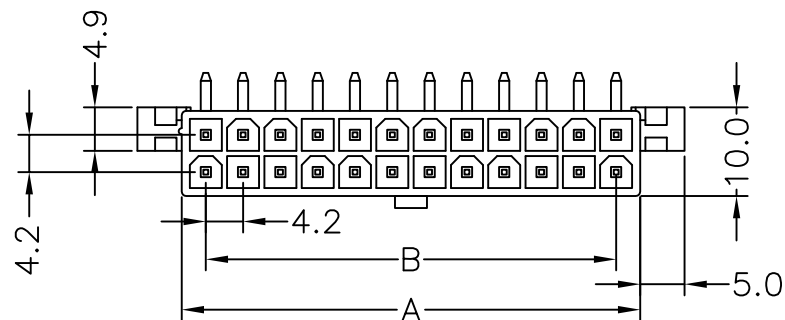


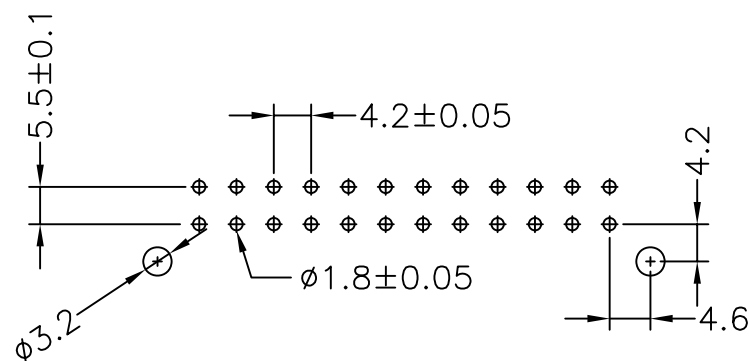

UNIT:mm

Circuits	Dim.B	Dim.A
2		5.4
4	4.2	9.6
6	8.4	13.8
8	12.6	18.0
10	16.8	22.2
12	21.0	26.4
14	25.2	30.6
16	29.4	34.8
18	33.6	39.0
20	37.8	43.2
22	42.0	47.4
24	46.2	51.6

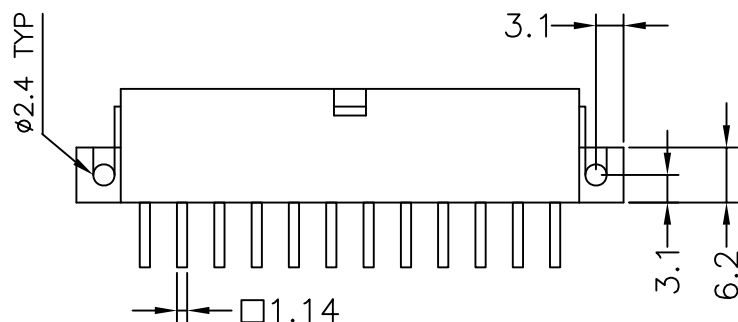

P.C.B. LAYOUT

Specification:

Material:

Headers pin- Brass Tin-plated
Rousings- Nylon 66 UL 94V-2

Specifications

- * Current rating: 7A AC, DC
- * Voltage rating: 250V AC, DC
- * Temperature range: -25°C~+85°C
- * Insulation resistance: 1,000MΩ min.
- * Withstand voltage: 1500V AC/minute
- * Applicable PC board thickness: .063" (1.6mm)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

MF-PRE-2Xxx-LF
SERIES LEADFREE
2X01:02WAY
2X12:24WAY
EAR
DIP 90°
MALE

DESCRIPTION: (4.20mm)MINI-FIT Power Connector System