

## Features:



- 2 ~ 24 circuits available
- Material: NY66 UL 94V-0 or 94V-2
- Positive housing locks
- 600V volts rating
- 10 milliohms contact resistance
- Current rating up to 9 amperes per circuits
- Recommended PCB thickness: .07”(1.78mm) max.

## Specifications:

- Voltage rating: 600V AC, DC (R.M.S.)
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -40 °C ~ 105 °C  
(including temperature rise)

## Ordering and Dimensional Information ( mm )

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2		5.4	14	25.2	30.6
4	4.2	9.6	16	29.4	34.8
6	8.4	13.8	18	33.6	39.0
8	12.6	18.0	20	37.8	43.2
10	16.8	22.2	22	42.0	47.4
12	21.0	26.4	24	46.2	51.6

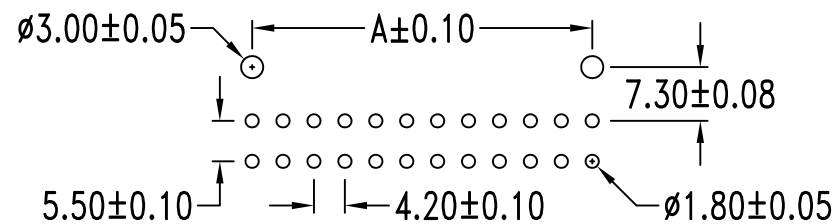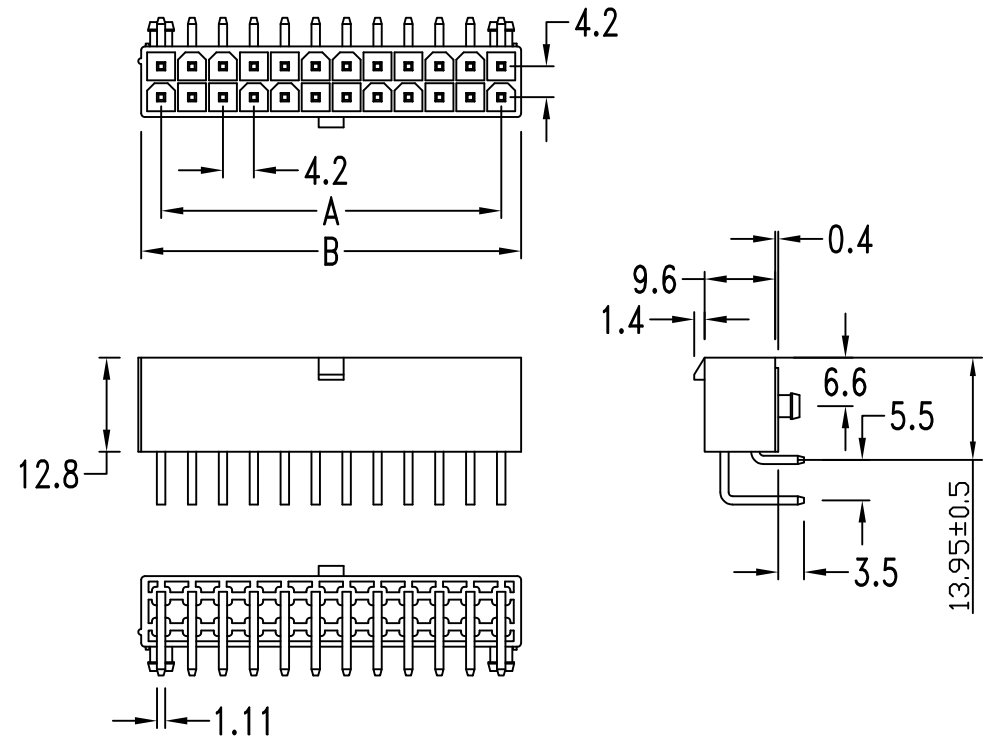

PCB LAYOUT: COMPONENT SIDE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PJECTION

TOLERANCES ARE

X, ±  
.X ± 0.40  
.XX ± 0.25  
.XXX ± 0.08  
ANG ±

照片框

ORDER INFORMATION

MF-PRPBK-2Xxx-LF  
SERIES | | | LEADFREE  
MALE | | POST | BLACK  
DIP 90°  
2X01:02WAY  
2X12:24WAY

DESCRIPTION: