

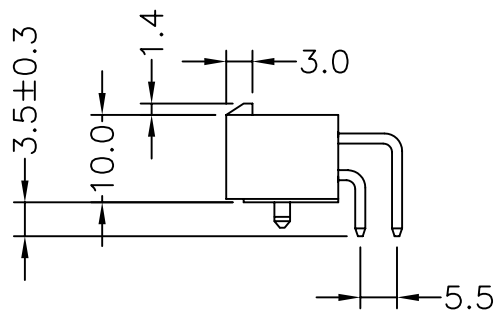
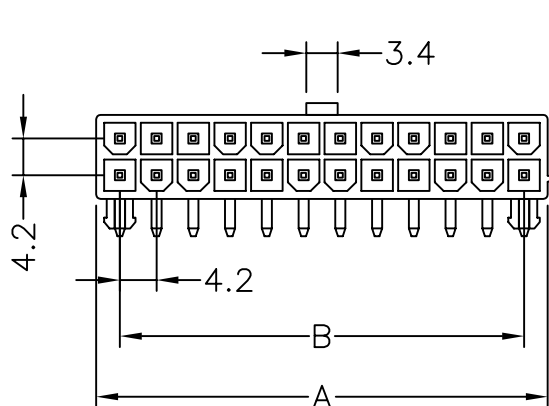


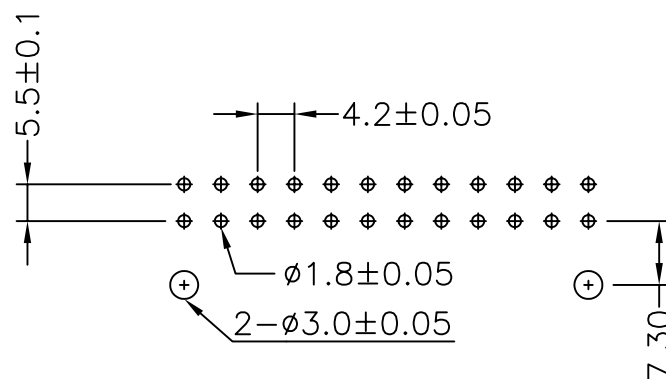

Specification:
Material:
Headers pin— Brass Gold-plated
Rousings— Nylon 66 UL 94V-2

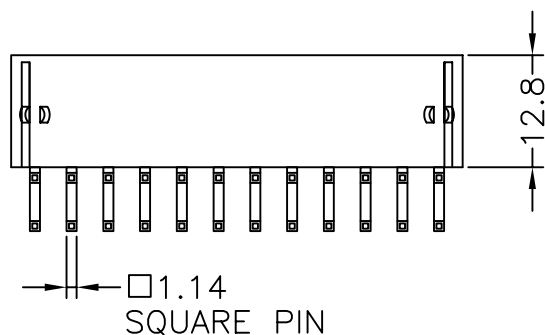

P.C.B. LAYOUT

UNIT:mm

Circuits	Dim.B	Dim.A	Circuits	Dim.B	Dim.A	Circuits	Dim.B	Dim.A
2		5.4	10	16.8	22.2	18	33.6	39.0
4	4.2	9.6	12	21.0	26.4	20	37.8	43.2
6	8.4	13.8	14	25.2	30.6	22	42.0	47.4
8	12.6	18.0	16	29.4	34.8	24	46.2	51.6

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X.±
.X±
.XX±
.XXX±
ANG±

照片框

ORDER INFORMATION

MF-PRPG01-2Xxx-LF
SERIES MALE POST GOLD LEADFREE
2X01:02WAY
2X12:24WAY
DIP 90°

DESCRIPTION: 4.2mm MIN FIT 90° 有柱