


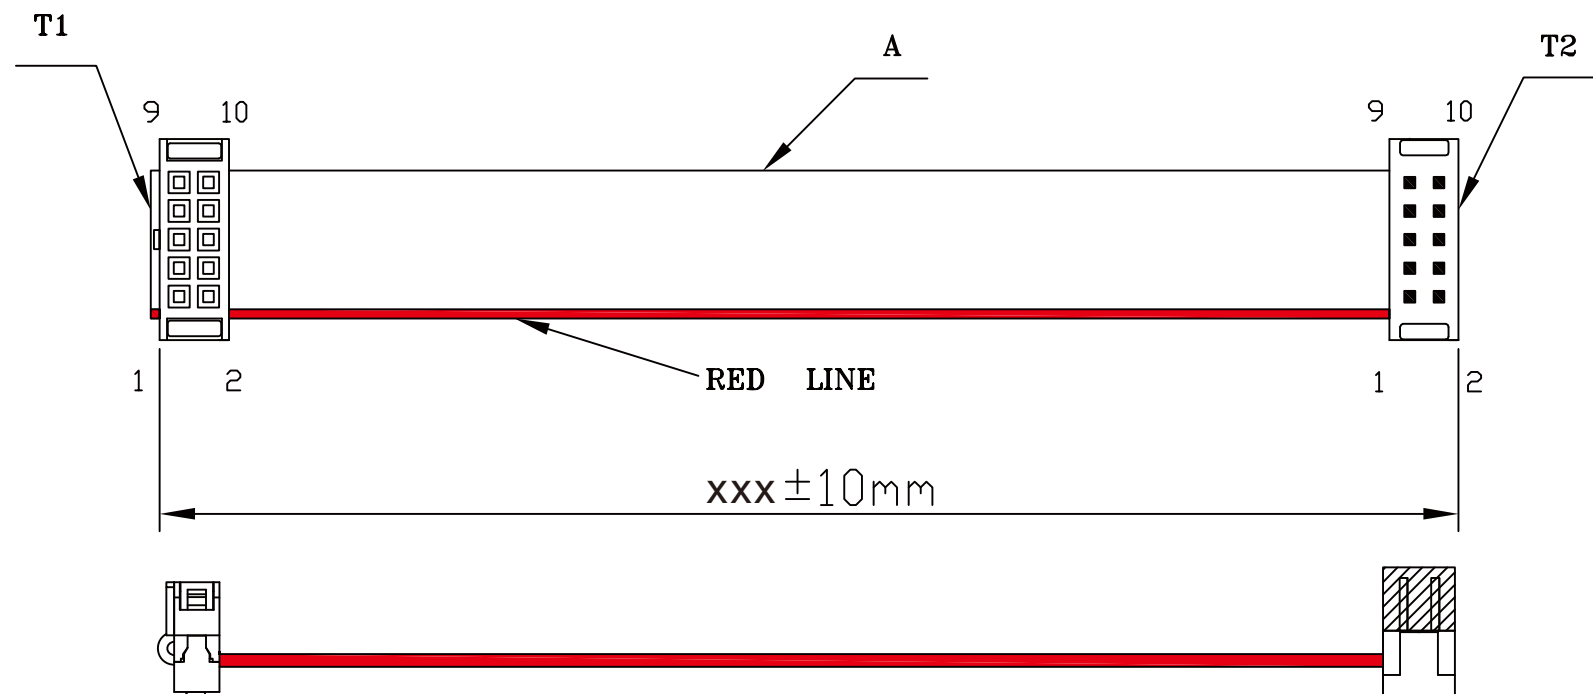

|        |                                            |
|--------|--------------------------------------------|
| 額定電壓   | DC絕緣300V / AC絕緣300V                        |
| 工作頻率   | DC / AC60Hz                                |
| 絕緣阻抗   | DC絕緣 100.0M $\Omega$ / AC2.00mA            |
| 皮線規格   | Composition : 7/ 0.127 / Thickness : 0.9mm |
| 工作電流   | 0.5Amp                                     |
| 用途     | 通訊                                         |
| 所力最大扭力 | 5kg                                        |

|    |                                              |
|----|----------------------------------------------|
| A  | UL2651 #28 *10P PH=1.0mm GRAY                |
| T1 | IDC SOCKET PH=2.0mm MF-C3-10 (三件式)           |
| T2 | IDCDIP PULG PH=2.0mm MIP-C2-10 PCB + 氣泡袋(保護) |

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

**RoHS Compliant**

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X,  $\pm$   
.X,  $\pm$   
.XX,  $\pm$   
.XXX,  $\pm$   
ANG,  $\pm$

PPOJECTION



**ORDER INFORMATION**

MF3MIP-1010-Axxx-LF

SERIES

LEADFREE

14C:14 CM  
22C:22 CM

FEMALE TO MALE  
10PIN TO 10 PIN

DESCRIPTION: