


Specifications:

- Current Rating:9.0A AC/DC
- Voltage Rating:600V AC/DC
- Contact Resistance:10m ohm. Max.
- Insulation Resistance:1000M ohm. Min.
- Withstanding Voltage:600V AC For One Minute
- Operating Temperature Range:-40°C To +105°C
- Materials:
- Insulator:High Temp. Plastic(Nylon66 UL94V-0)
- Insulator Color:White
- Contact:Brass
- Plating:Tin Plated

Dimension:

Circuits	Dim A	Dim B	Circuits	Dim A	Dim B
2	—	10.8	14	25.20	36.0
4	4.20	15.0	16	29.40	40.2
6	8.40	19.2	18	33.60	44.4
8	12.60	23.4	20	37.80	48.6
10	16.80	27.6	22	42.00	52.8
12	21.00	31.8	24	46.20	57.0

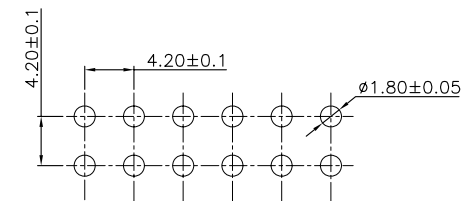

RECOMMENDED P.C.B LAYOUT

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

- X. ±
- .X ±
- .XX ±
- .XXX ±
- ANG ±

PJECTION

照片框

ORDER INFORMATION

MFB-PDX4-2Xxx-LF
 SERIES | LEADFREE
 MALE | 2X02:04WAY
 | 2X12:24WAY
 | 4.2mm ROW
 | NON POST
 | DIP 180°

DESCRIPTION: 4.2mm Power Wafer Double Rows Straight Blind-mate Type