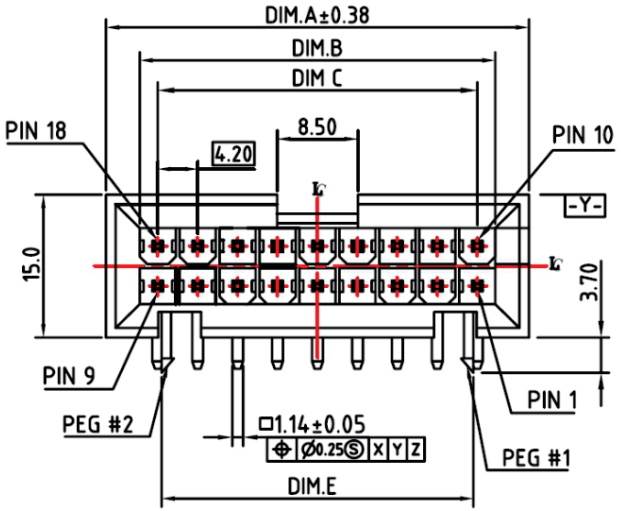

NOTE:
1. OPERATION TEMPERATURE : -40°C-105°C
2. DIMENSIONS SHALL BE INTERPRETED PER ANSI Y14.5M-1994
3. CONTACT RETENTION FORCE : 1.36 kgf MIN. PER CONTACT.

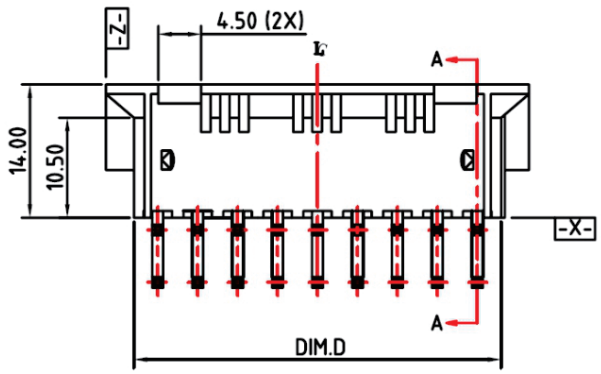

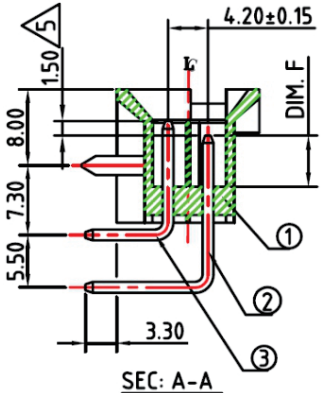

SEC: A-A

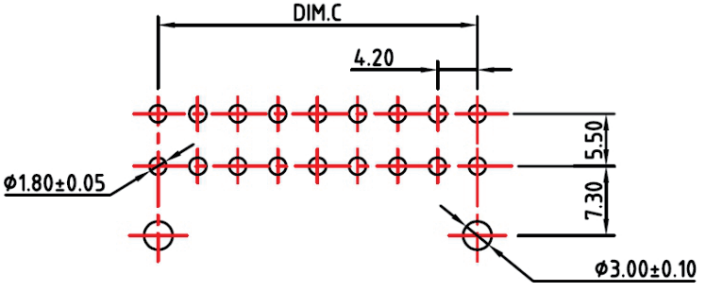

RECOMMENDED PCB LAYOUT

ITEM	Q' TY	DESCRIPTION
③	BASE ON SINGLE ROW POSITION	CONTACT, BRASS, 50u" MIN. NICKEL UNDER PLATING
②	BASE ON SINGLE ROW POSITION	CONTACT, BRASS, 50u" MIN. NICKEL UNDER PLATING
①	1	HOUSING, NYLON 6.6 UL94V-0, COLOR WHITE

	9/18	44.48	37.40	33.60	38.6	32.8
	NO. OF POS.	DIM.A	DIM.B	DIM.C	DIM.D	DIM.E

PIN 1, 18	OTHERS
LONG (6.90) PIN NO.	SHORT (5.40) PIN NO.
DIM. F (MATING LENGTH)	

RoHS Compliant

MORETHANALL PCB CONNECTORS Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY	
CHECKED BY GENIUS	
UNIT / mm	SCALE 1 : 1
DATE	
SIZE A4	PPOJECTION

TOLERANCES ARE
X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

MFB-PRP-2X09PM118-LF

SERIES
MALE
DIP 90°
POST
18 WAY
PREMATE 1,18 PIN
LEADFREE

DESCRIPTION: