
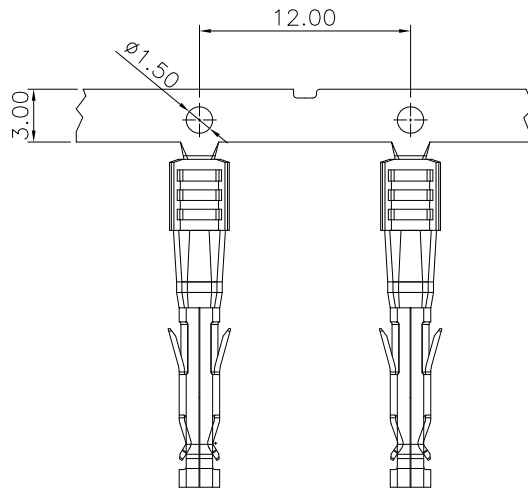




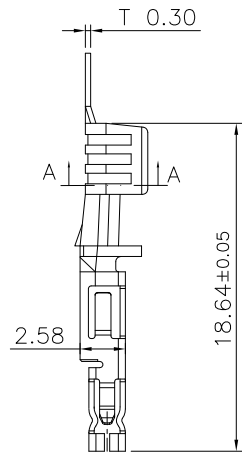


Specifications:

Current Rating:12~21.0A AC/DC
 Voltage Rating:600V AC/DC
 Contact Resistance:30m ohm. max.
 Insulation Resistance:1000M ohm. min.
 Withstanding Voltage:600V AC For One Minute
 Operating Temperature Range:-25°C ~ +85°C


Material and Finish

Contact:High Performance Alloy
 Plating:Selective Gold plated



SECTION A-A
 SCALE 2:1

CONDUCTOR CRIMP 12 AWG



SECTION A-A
 SCALE 2:1

CONDUCTOR CRIMP 14/16 AWG

Part No	Wire Apply	INS. O.D.
MGF-FT-12	12AWG	4mm ² or2.5mm ²
MGF-FT-14	14-16AWG	1.5mm ²

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X. ±
 .X ± 0.20
 .XX ± 0.15
 .XXX ±
 ANG ±

照片框

ORDER INFORMATION

MGF-FT-xx-LF
 SERIES | LEADFREE
 14:14~16 WAY
 12:12 WAY
 TERMINAL
 FEMALE

DESCRIPTION: 5.7mm Power RECEPTACLE TERMINAL

