

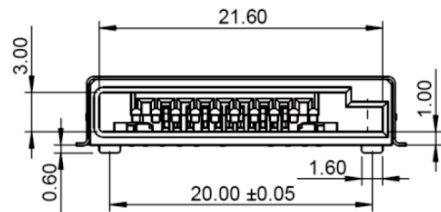


- NOTES :
- MATERIAL :
 INSULATOR : PA9T UL 94V-0, IVORY
 CONTACT : COPPER ALLOY
 - PANTING
 CONTACT: 10u"MIN. Au OVER 50u"MIN. NICKEL
 SOLDER TAIL: 100u"MIN. Sn OVER NICKEL

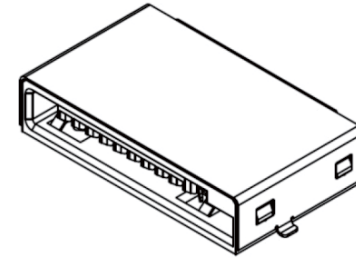

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MHC-W20-301-LF
 SERIES | LEADFREE
 3 IN 1
 POST TO POST 20.0mm
 90°SMT

DESCRIPTION: