

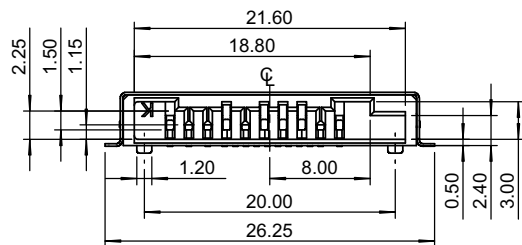


- NOTES :
1. MATERIAL :  
INSULATOR : HIGH TEMPRATURE THERMOPLASTIC, IVORY  
CONTACT : COPPER ALLOY
  2. APPLICATION:  
MS & MS Duo & MS PRO & MS PRO Duo & MagicGate MS Duo & MS I/O Expansion & MS-ROM & MS Duo-ROM & MagicGate MS & MS PRO-HG



RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X ±

UNIT / mm

SCALE 1 : 1


.XXX ±

DATE

ANG ±

SIZE A4

PJECTION





ORDER INFORMATION

MHC-W20XAS-1001-LF  
SERIES | | | | LEADFREE  
| | | | 10 IN 1  
| | | | SHORT BODY  
90°SMT | | | | A TYPE  
| | | | NON PUSH  
| | | | POST TO POST 20.0mm

煜倫股份有限公司


www.morethanall.com

DESCRIPTION: 10 IN 1 CONNECTOR(REVERSE)

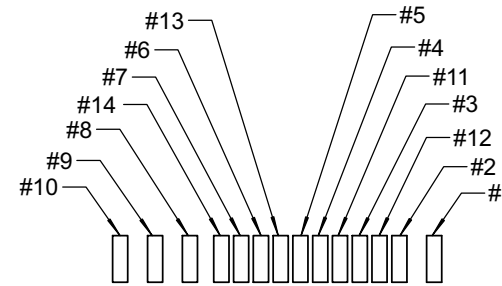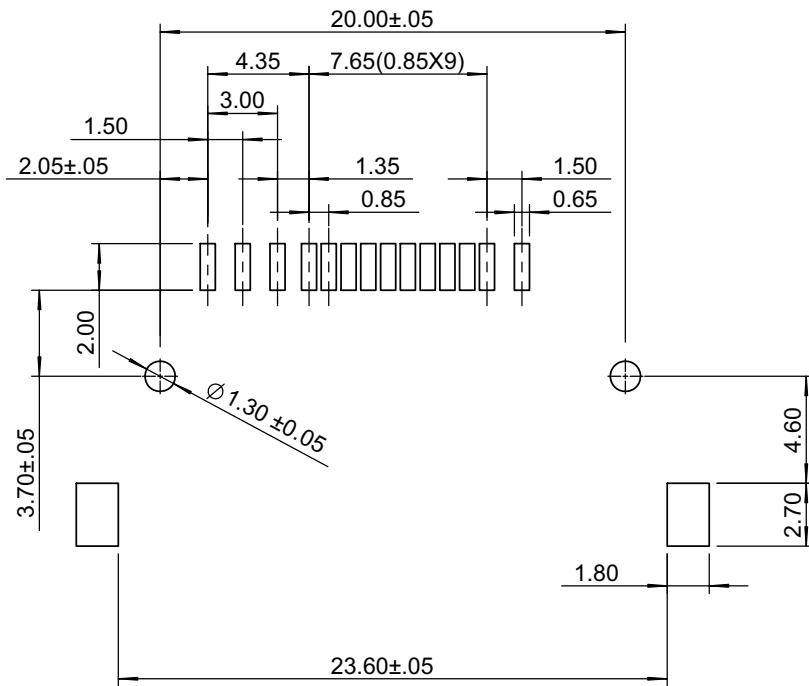

PIN DEFINITION

MS#1	VSS
MS#2	BS
MS#3	DATA1
MS#4	SDIO/DATA0
MS#5	DATA2
MS#6	INS
MS#7	DATA3
MS#8	SCLK
MS#9	VCC
MS#10	VSS
MS#11	DATA4
MS#12	DATA5
MS#13	DATA6
MS#14	DATA7

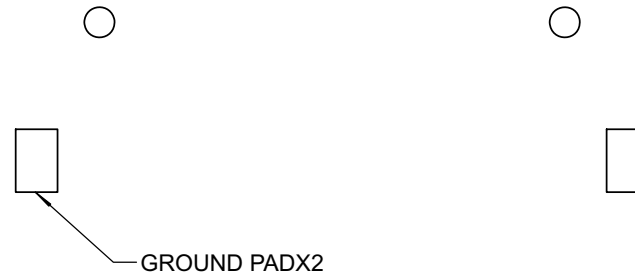

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

X. ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

P PROJECTION



ORDER INFORMATION

MHC-W20XAS-1001-LF

SERIES | | | | LEADFREE  
 90°SMT | | | | 10 IN 1  
 NON PUSH | | | | SHORT BODY  
 POST TO POST 20.0mm

DESCRIPTION: 10 IN 1 CONNECTOR(REVERSE)