
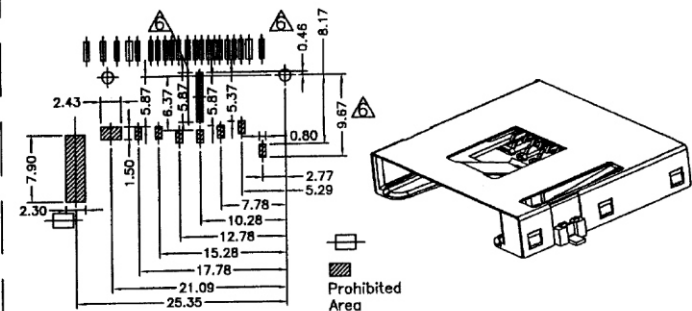


△ MS—DUO CARD	
PIN20	VSS
PIN18	VCC
PIN17	SCLK
PIN15	Reserved
PIN14	INS
PIN11	Reserved
PIN9	SDIO
PIN8	VCC
PIN6	BS
PIN4	VSS

MATERIAL:
 Insulator: Thermal Plastic UL94V-0
 Contacts: Copper Alloy
 Shell: Stainless Steel
 Compress Spring: Stainless Steel
 Lead Shaft: Sus304
CONTACT PLATING
 Underplate: 50u"~100u" Nickel
 Contact Area: 1u"~30u" Selective Gold
Solder Tails Area: 100u"~200u" Tin/Lead(Brighten Tin) or
 100u"~200u" Tin/Lead Free(Brighten Tin/Matte Tin)

ELECTRICAL
 Operation Voltage: 250 VAC max.
 Current Rating: 0.5 Amps Max.
 Contact Resistance: 100 mohms Max.
 Insulation Resistance: 1000 Mohms Min @ 500 VDC
 Dielectric Withstanding Voltage: 500 VAC / minute
 Temperature Range: -25°C TO +85°C

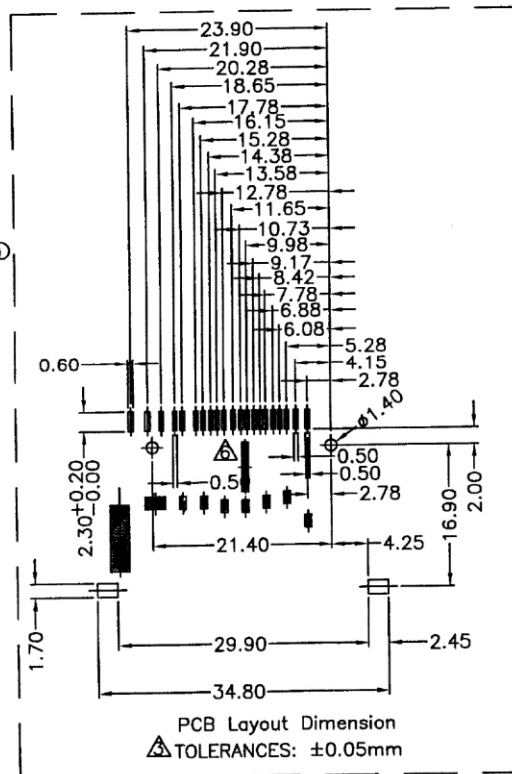

照片框

SERIES 3 IN 1 LEADFREE
POST 21.00mm
90°SMT

DESCRIPTION: