


- NOTES :
1. MATERIAL :
INSULATOR : HIGH TEMPERATURE THERMOPLASTIC
FLAMMABILITY RATING : UL94V-0 COLOR : BLACK
CONTACT : COPPER ALLOYS
COVER : STAINLESS STEEL
 2. CONTACT AREA PLATING : GOLD OVER Ni
 3. MULTIMEDIA CARD COMPATIBLE
 4. COPLANARITY OF SODTERIALS BE WITHIN 0.10mm
 5. W/P : SD CARD WRITE PROTECT
C/D : SD CARD CARD DETECT INDICATION


SD CARD CIRCUIT :

WITH OUT CARD		CARD INSERTED WRITE PROTECT : LOCK		CARD INSERTED WRITE PROTECT : UNLOCK	
W/P (#15)	GND (#16)	W/P (#15)	GND (#16)	W/P (#15)	GND (#16)
C/D (#06)	VSS1 (#07)	C/D (#06)	VSS1 (#07)	C/D (#06)	VSS1 (#07)




MHC-W26PB-201-LF
LEADFREE
RoHS Compliant


	PART NO. MHC-W26PB-201		TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIP TION:				
	DWG NO. MHC-W26PB-201						CHECKED BY CY	
焯倫股份有限公司	FILE NO.		DRAWING BY		AREA	REVISIONS	HK	DATE
	UNIT / mm	SCALE 1:1	PROJECTION					

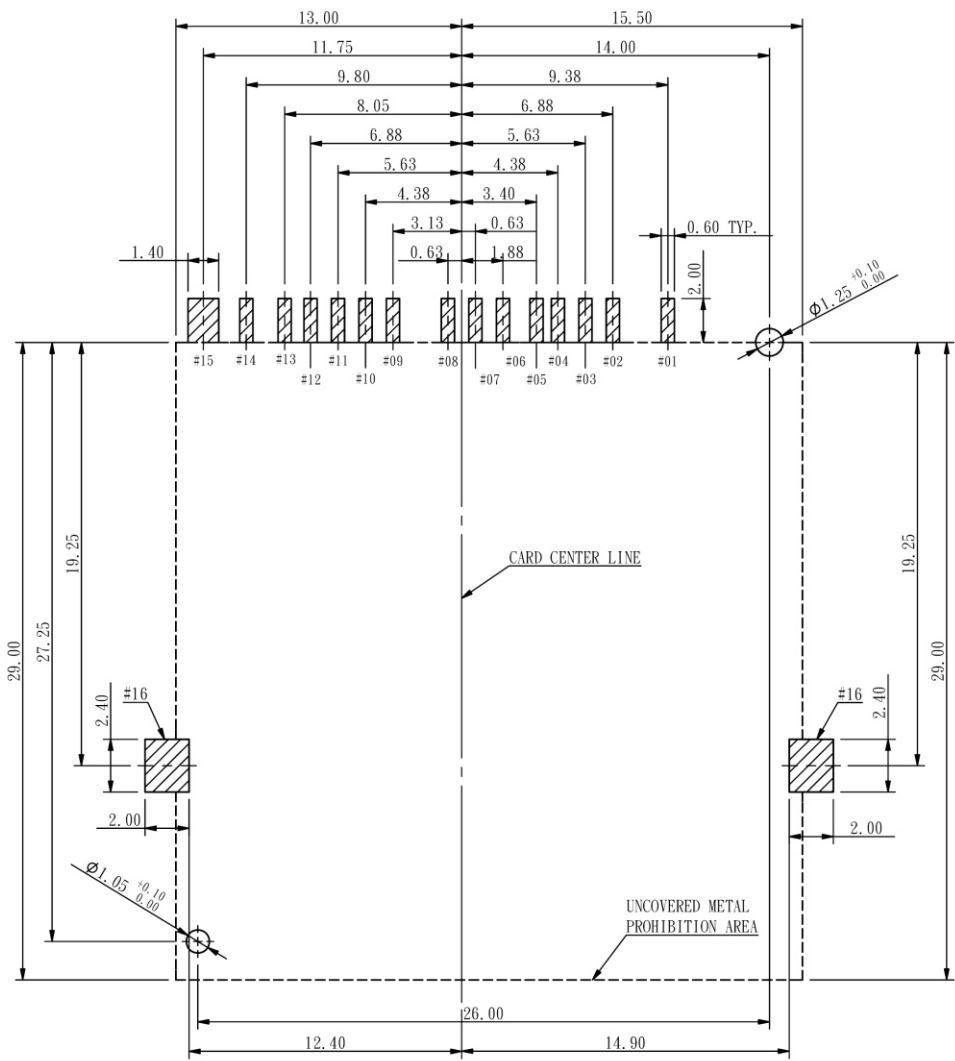

RECOMMEND P. C. B. LAYOUT
TOLERANCE ± 0.05

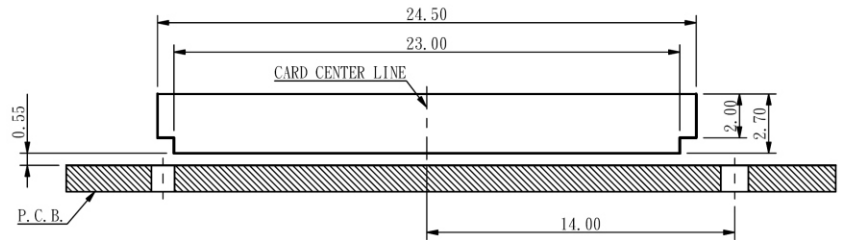

RECOMMEND CARD SLOT
TOLERANCE ± 0.05

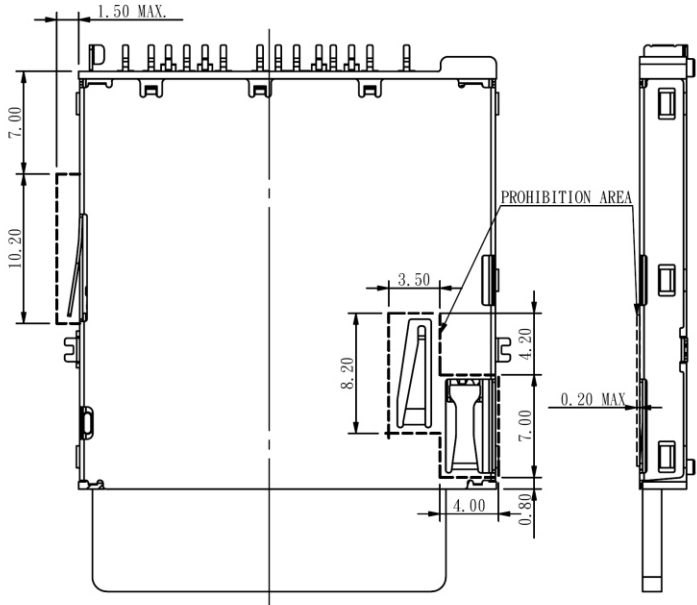

A SIZE WHEN A HOOK PART
OPERATES (MAX. 1.5mm)

PIN NO.	NAME
#01	DAT2
#02	DAT3
#03	DAT4
#04	CMD
#05	DAT5
#06	C/D
#07	VSS1
#08	VDD
#09	CLK
#10	DAT6
#11	VSS2
#12	DAT7
#13	DAT0
#14	DAT1
#15	W/P
#16	GND

MORETHANALL
CONNECTORS
ASSEMBLIES

煜倫股份有限公司

PART NO. MHC-W26PB-201

DWG NO. MHC-W26PB-201

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

- .X ± 0.2
- .XX \pm
- .XXX \pm
- AWG

DESCRIPTION:

2 IN 1 CONNECTOR
NORMAL PUSH-PUSH TYPE
(SD,SD I/O,MMC,MMC 4.0)

AREA

REVISIONS

HK

DATE