
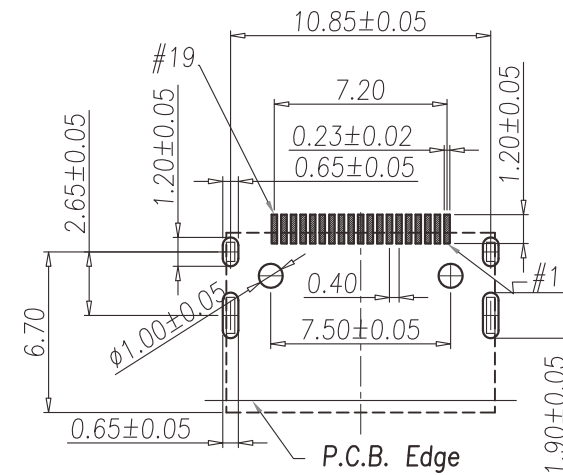
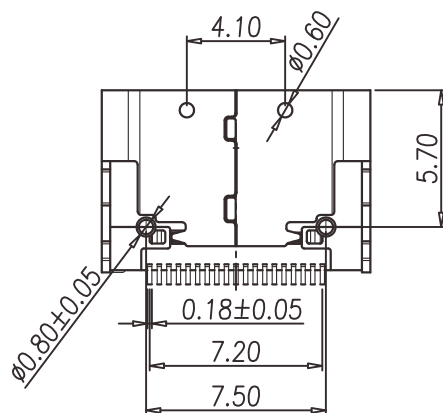
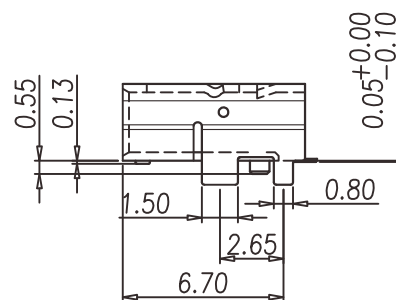
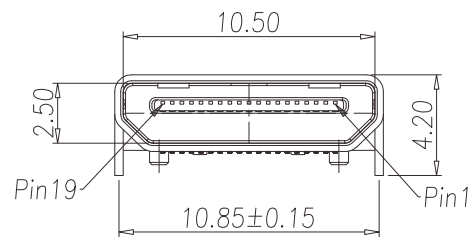
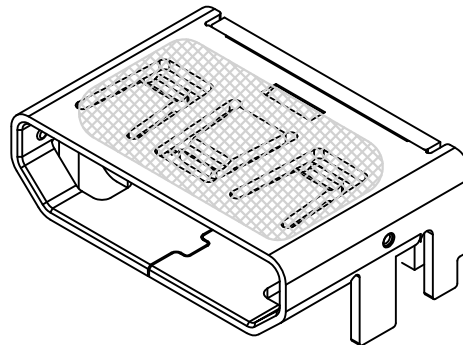


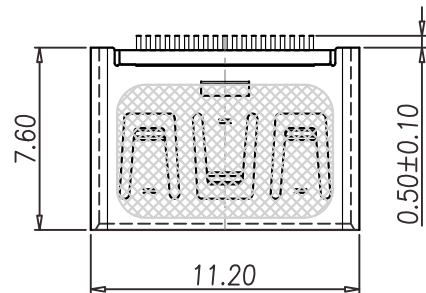

Recommend P.C.B Layout

1. MATERIAL :
 - 1-1. HOUSING : LCP UL94V-0 ; COLOR : BLACK
 - 1-2. CONTACT : PHOSPHOR BRONZE
 - 1-3. SHELL : BRASS
2. FINISH :
 - 2-1. CONTACT :
 - CONTACT AREA : 15 MICRO INCHES MIN. GOLD PLATED
 - SOLDER AREA : GOLD FLASH.
 - UNDER PLATE : NICKEL
 - 2-2. SHELL : NICKEL PLATED 60u"OVER ALL

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.20
.XX ± 0.10
.XXX ± 0.05
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MHDMI-SWMM26CR-19-LF

SERIES

FEMALE

LEADFREE

19WAY

REEL

MYLAR

90°SMT

METAL FOOT+METAL FOOT 2.65mm

DESCRIPTION: HDMI 19PIN (F) C TYPE DIP (JAE TYPE)

步驟一:






- 1.將成品一一放入包裝盤內,依同一方向置入。
- 2.包裝方式,如圖所示。
- 3.一個包裝盤800pcs.

步驟二:

- 1.一個紙箱可以裝10個包裝盤。
- 2.每盤800pcs,每箱8000pcs.
- 3.將包裝盤放入防水袋中,包裝完後再封箱。

步驟三:

- 1.用膠帶將紙箱封實。
- 2.將標籤貼於紙箱上。

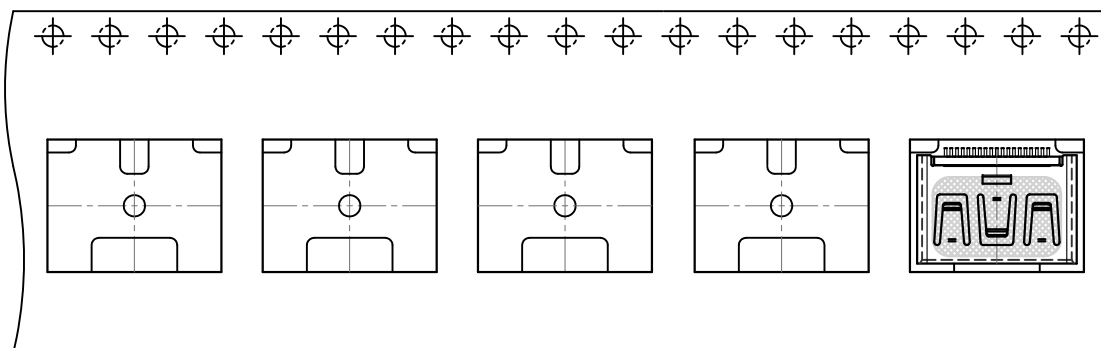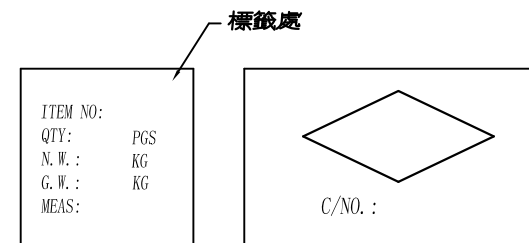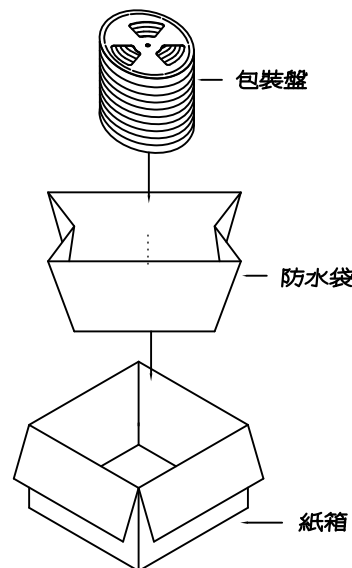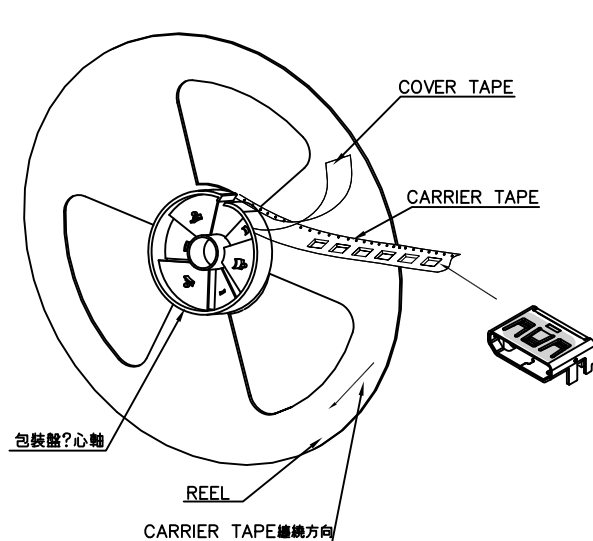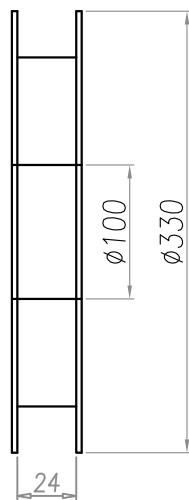

NOTE:

- 1.若有未裝滿之零數箱,必須以緩衝材塞滿。
- 2.在搬運過程中要輕拿輕放。
- 3.載運輸中不可堆放過多,不可有重壓現象。
- 4.在裝滿產品後,必須空留帶前和帶後42格,然後用紙膠布貼上。
- 5.上帶在貼下帶時必須平整,且黏貼處不要出現氣泡。

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.20
.XX ± 0.10
.XXX ± 0.05
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MHDMI-SWMM26CR-19-LF

SERIES

FEMALE

REEL

MYLAR

METAL FOOT+METAL FOOT 2.65mm

90°SMT

LEADFREE

19WAY

DESCRIPTION: HDMI 19PIN (F) C TYPE DIP (JAE TYPE)