




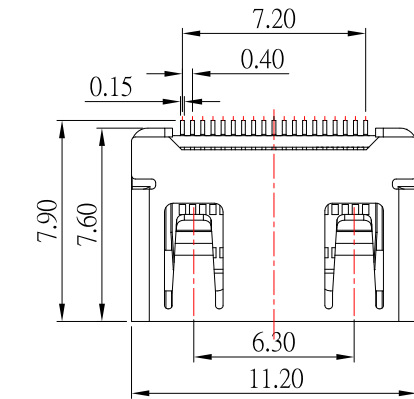

SECTION A-A
SCALE 4:1

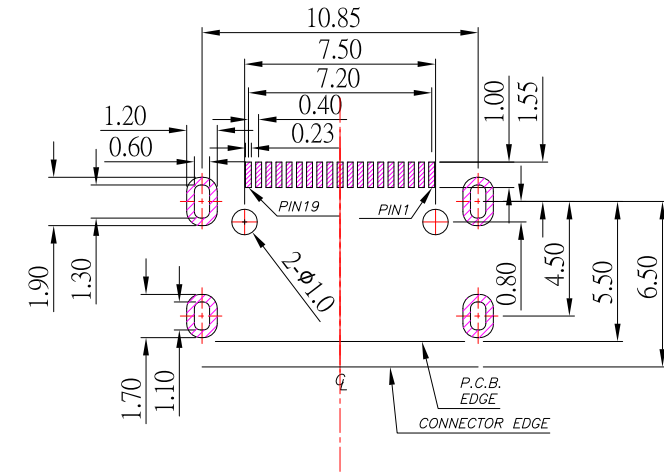

RECOMMENDED PCB LAYOUT(TOP VIEW)

NOTE:

1.MATERIAL:


- 1.1 HOUSING: LCP,UL94V-0, BLACK
- 1.2 CONTACT: PHOSPHOR BRONZE
- 1.3 SHEEL: BRASS

2.PLATING :


- 2.1 CONTACT: PLATED GOLD IN MATING AREA ;
TIN PLATED ON SOLDER BALLS ;
NICKEL UNDER PLATED OVERALL
- 2.2 SHELL: NICKEL UNDER PLATED SURFACE LAYER
OR GOLD UNDER PLATED SURFACE LAYER

3.MECHANICAL:



- 3.1 INSERTION FORCE: 4.5 Kg_f MAX
- 3.2 WITHDRAWAL FORCE: 0.71~2.55 Kg_f

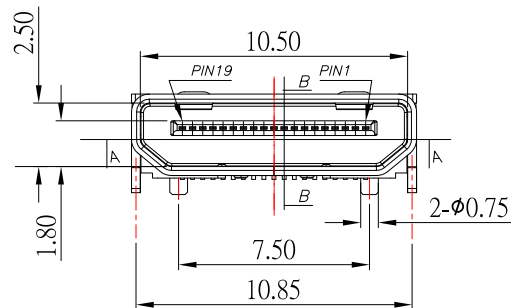

SECTION B-B
SCALE 4:1



DETAIL A
SCALE 16:1

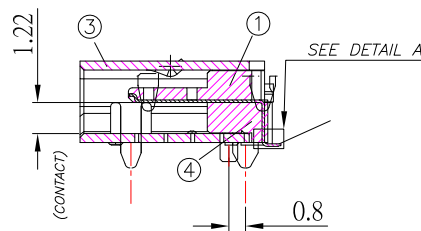

照片框

RoHS Compliant

TOLERANCES ARE

- Up to 5 ±0.2
- Above 5 ~ 15 ±0.3
- Above 15 ~ 30 ±0.4
- Above 30 ~ 50 ±0.5
- Angle ±0.3°

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

ORDER INFORMATION

MHDMI-SWMMPR-19-LF

SERIES FEMALE 90°SMT REEL POST EAR METAL LEADFREE 19WAY


DESCRIPTION:

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

PACKING DRAWING

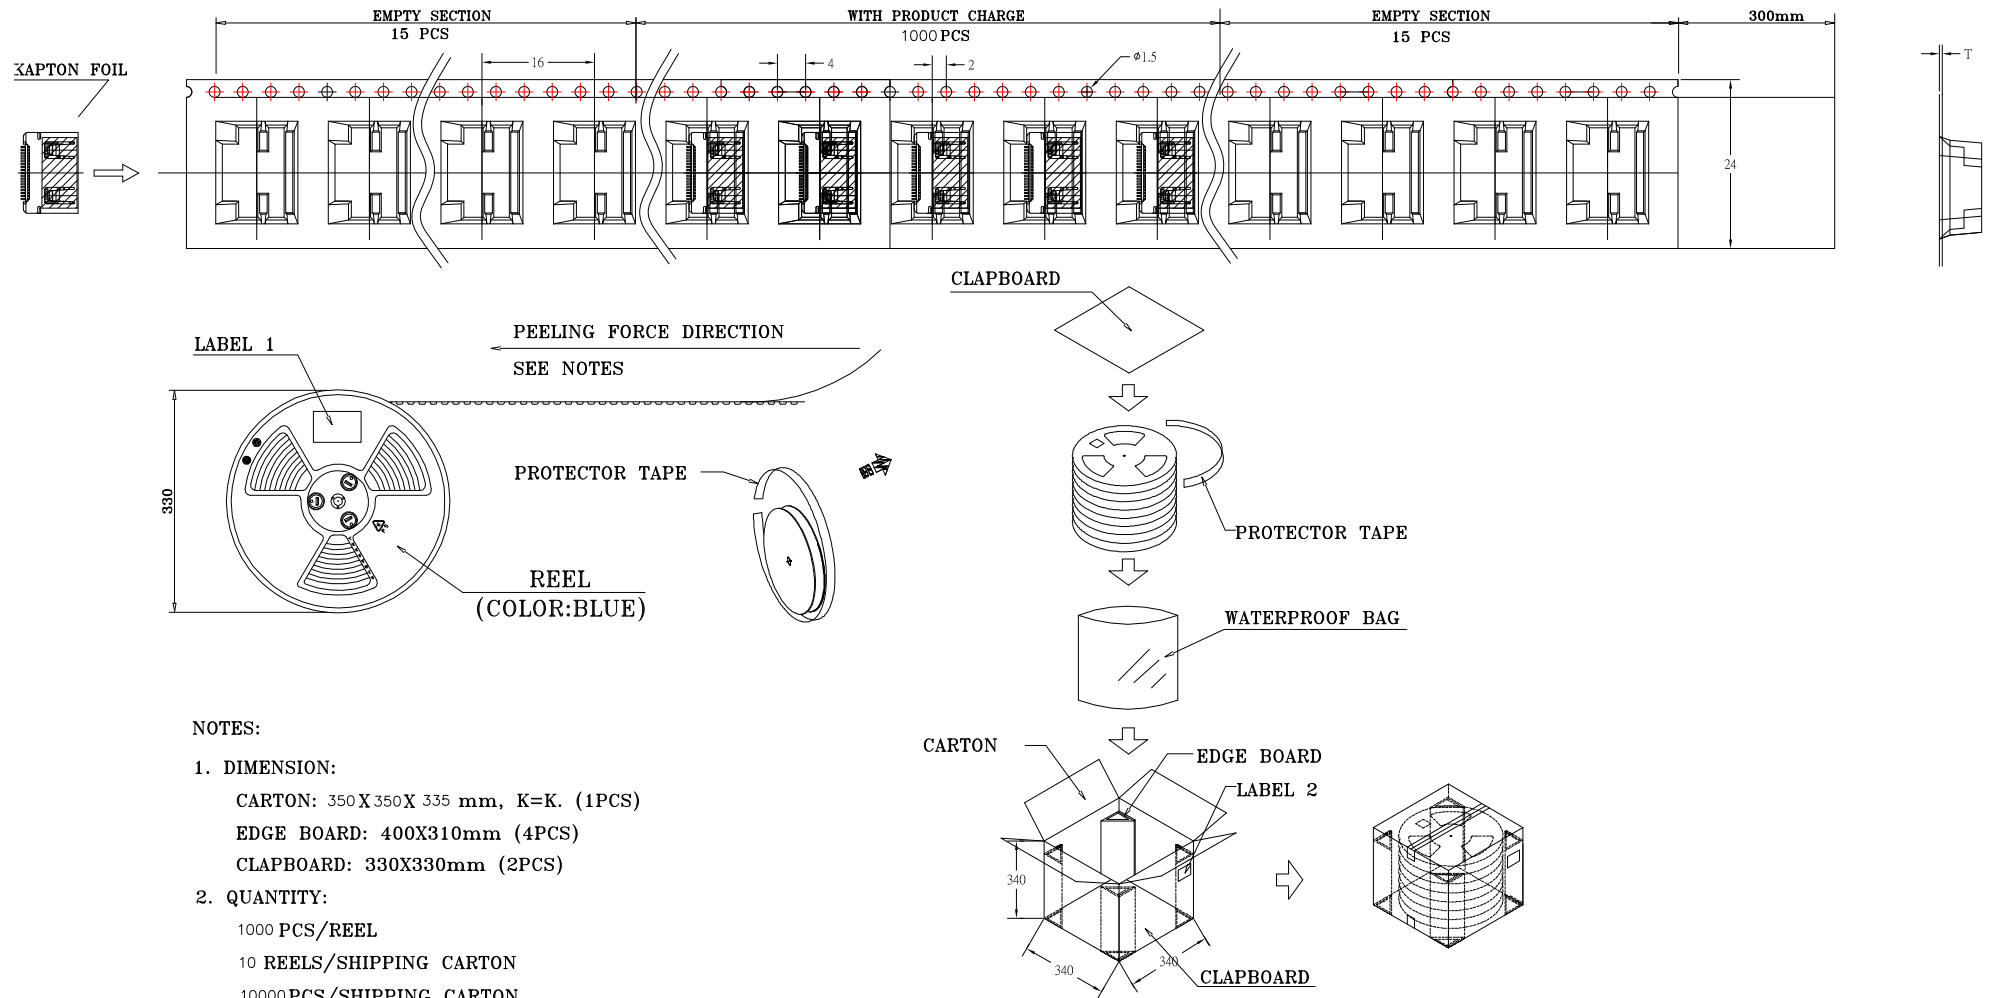

NOTES:

1. DIMENSION:

CARTON: 350X350X 335 mm, K=K. (1PCS)

EDGE BOARD: 400X310mm (4PCS)

CLAPBOARD: 330X330mm (2PCS)

2. QUANTITY:

1000 PCS/REEL

10 REELS/SHIPPING CARTON

10000 PCS/SHIPPING CARTON

RoHS Compliant

TOLERANCES ARE

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

照片框

ORDER INFORMATION

MHDMI-SWMMPR-19-LF
SERIES FEMALE 90°SMT REEL POST EAR METAL LEADFREE 19WAY

DESCRIPTION:

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION