

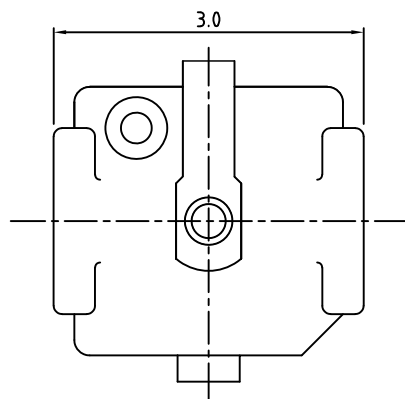
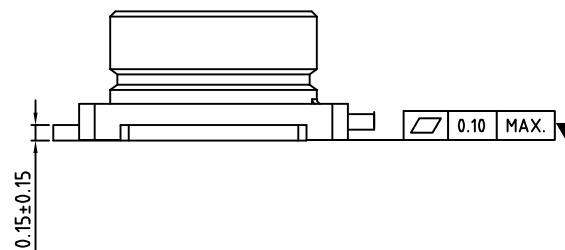
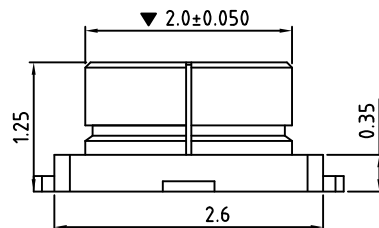
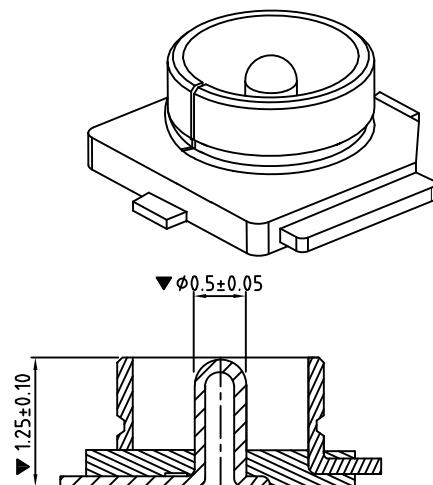


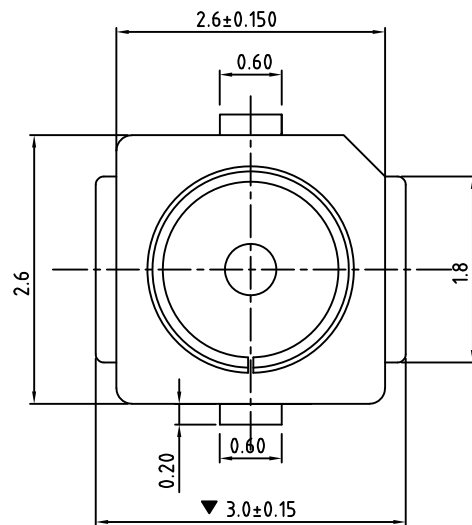

- NOTE: UNLESS OTHERWISE SPECIFIED
1. DIMENSION SHALL BE INTERPRETED PER ANSI Y14.5M-1994.
 2. DIMENSION MARKED WITH " " SHOULD SPECIFIED ON INSPECTION PLAN.
 3. CONTACT RETENTION FORCE: 0.4 N MIN.
 4. CONTACT MATERIAL: COPPER ALLOY.
 5. INSULATOR: HIGH TEMPERATURE PLASTIC UL94 V-0.
 6. CENTER PIN FINISH: GOLD PLATED 1u" MIN. ON MATING AREA, GOLD FLASH ON SHELL. ALL OVER 50u" NICKEL UNDER PLATED.
 7. ALL MATERIAL MEET RoHS SPECIFICATION AND IN CONFORMITY WITH REACH & SVHC STANDARD STIPULATIONS.
 8. VSWR AND RETURN LOSSES (db)

ITEM \ FREQ.	0-3GHz	3-6GHz	6-8GHz	8-10GHz	10-12GHz
VSWR	1.2	1.25	1.3	1.4	1.5
RETAIN	-22	-19.5	-18.5	-18.5	-15

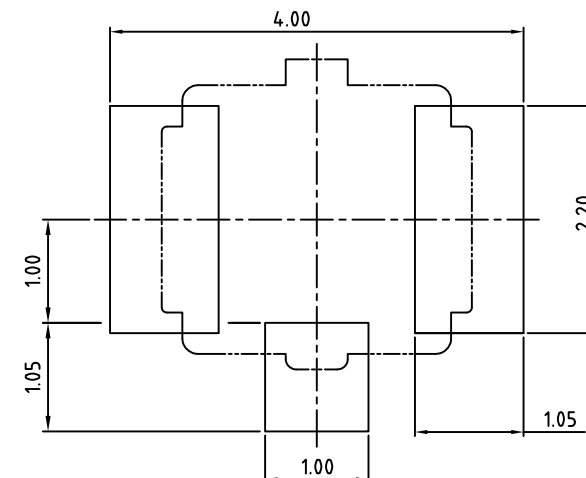

RECOMMENDED PCB LAYOUT

3	GROUND PAD	METAL SHELL, GOLD/BRIGHT GOLD PLATING	1
2	CENTER PIN	CENTER CNT, GOLD/BRIGHT GOLD PLATING	1
1	HOUSING	OVER MOLD HOUSING, LCP, IVORY, UL94V-0	1
ITEM	PART NUMBER	DESCRIPTION	Q'TY

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.30
.X ± 0.15
.XX ± 0.10
.XXX ±
ANG ± 1°

PPOJECTION

照片框

ORDER INFORMATION

MHF-JV-50-LF

SERIES T LEADFREE
50 OHM
180°SMT
JACK

DESCRIPTION: RF HEADER(U.FL)