
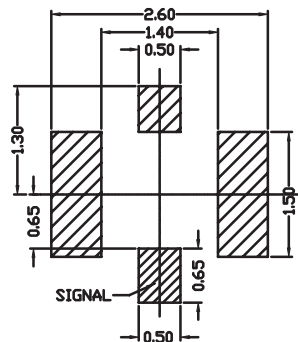


Note:

1. Frequency Range:
DC up to 6GHz(VSWR:1.3MAX)
2. Voltage rating:
AC60V
- 3.Characteristic Impedance :
50Ω (rominal)
4. Insulation resistance: 100M以上
5. Operating temperature: -40 ~ +90°C
6. Low level Contact Resistance:
MAX20mΩ (Signal)
MAX10mΩ (Ground)

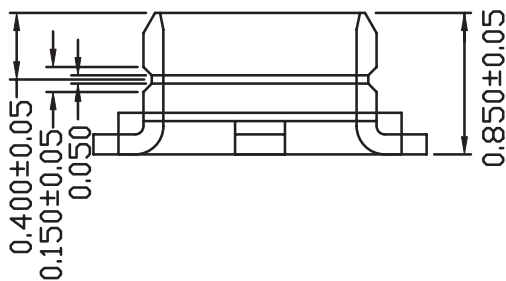

RECOMMENDED PCB LAYOUT (THK=1.6+/-0.15mm)
(TOLERANCES ±0.05)

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm SCALE 1:1

DATE

SIZE A4


TOLERANCES ARE

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PJECTION

照片框

ORDER INFORMATION

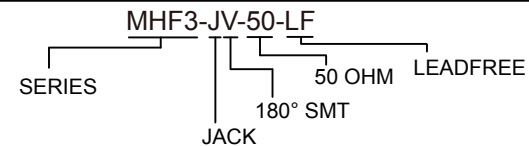

DESCRIPTION: 微型同轴射频系列板端成品