



接頭方向



Electric Test:
CABLES ASSEMBLY TO BE 100% TESTED FOR CONTINUITY, SHORTS AND OPENS.

- NOTES:
- 1.FREQUENCY(MHz): <6GHz.
 - 2.S.W.R.: <1.8
 - 3.INSERTION: <0.3dB.
 - 4.IMPEDANCE: 50 Ohm.
 - 5.OPERATION TEMPERATURE : -40 C TO +90 C.
 - 6.STORGE TEMPERATURE : -40 C TO +90 C.

凡標註△記號者, 為品管檢驗之尺寸

Detail A

NO.	NAME	DESCRIPTION	QTY
⑥	Connector	IPEX-I Gold-Plated	1
⑤	Nut	BRASS Gold-Plated	1
④	Washer	BRASS Gold-Plated	1
③	Cable	1.13 Gray Cable ,50 Ohm	1
②	H.S. Tube	Heat Shrink Tube	1
①	Connector	SMA Female head	1

RoHS Compliant


TOLERANCES ARE

- X. ± 0.50
- .X ± 0.38
- .XX ± 0.25
- .XXX ± 0.10
- ANG ± 3°

照片框

ORDER INFORMATION

MHFRPSMA-1R1S113-E15C-LF

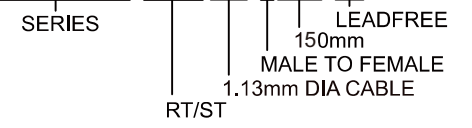

DESCRIPTION: SMA to I-PEX for 1.13 Cable

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY		
CHECKED BY GENIUS		
UNIT / mm	SCALE 1 : 1	
DATE		
SIZE A4	PPOJECTION	