


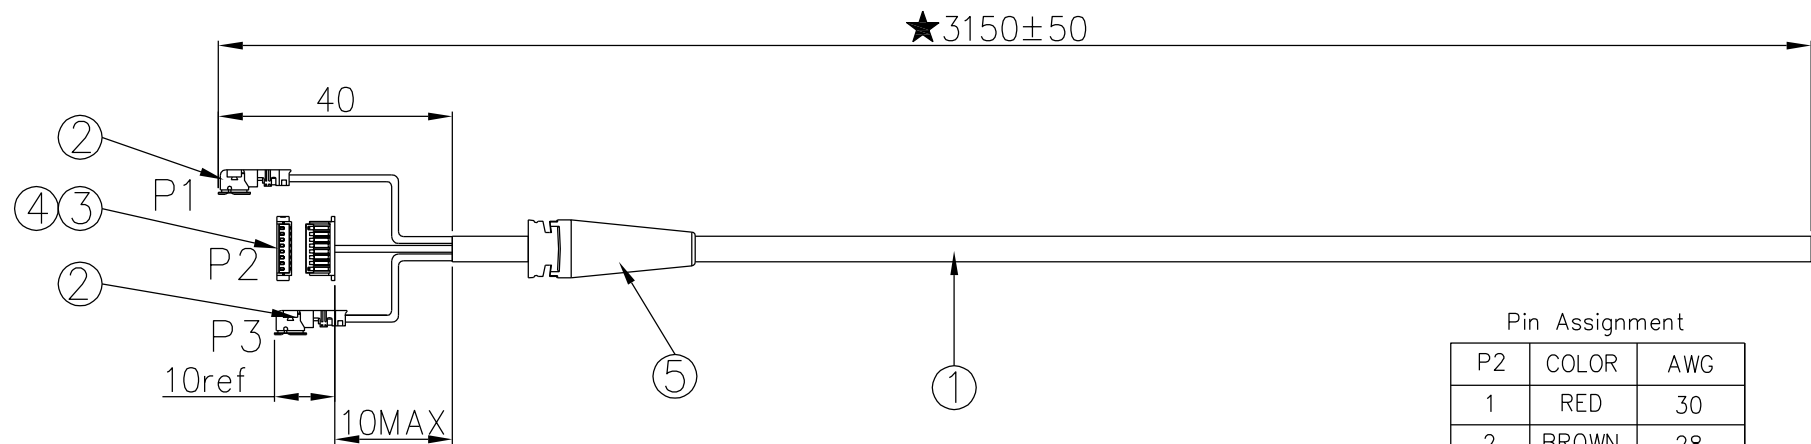

NOTE:

- 1.FINAL DESIGN OF STRAIN RELIEFS WILL BE CLOSED AFTER FINALIZING CABLE SPEC
 - 2.ALL MATERIALS AND PROCESSES MUST BE ROHS AND REACH COMPLIANT
- MEET RoHS & Lead free

ELECTRONIC TEST:

- 1.Voltage:DC 300V 5M ohm/10s.
- 2.Contact resistance:3.0 ohm MAX.
- 3.100% Open,Short,Mis-Wire Testing.

Pin Assignment

CONNECTOR	CABLE	AWG
P3	LOW V COAX	36
P1	HIGH V COAX	36

Pin Assignment

P2	COLOR	AWG
1	RED	30
2	BROWN	28
3	GREEN	30
4	GRAY	30
5	WHITE	30
6	BLUE	30
7	BLACK	30
8	YELLOW	30
9	RED	30
10	BLACK	30

7	1/2000		HOUSING:10P P=1mm P/N:SAMTEC ISS1-10	测试头
6	1/2000		COAXIAL CONN:I-PEX MHF Micro	测试头
5	1		c-FLOW3310-P:SENSOR LONG STRAIN RELIEF FOR PROBE P/N:MEC	MEET RoHS & Lead free
4	10		TERMINAL:Phosphor Bronze P/N:CC09R-01-GF	MEET RoHS & Lead free
3	1		HOUSING:10P P=1mm P/N:SAMTEC ISS1-10	MEET RoHS & Lead free
2	2		COAXIAL CONN:I-PEX MHF Micro Viatte	MEET RoHS & Lead free
1	1/2		CABLE:ULXX 36#COAX*2C+30#*9C+28#*1C L=6300mm	MEET RoHS & Lead free
ITEM	Q'TY	P/N	DESCRIPTION	

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

MHFSHX30-01R102836-F124N

SERIES

R/A

10PIN

3150mm

FEMALE

28,36 AWG

DESCRIPTION: