


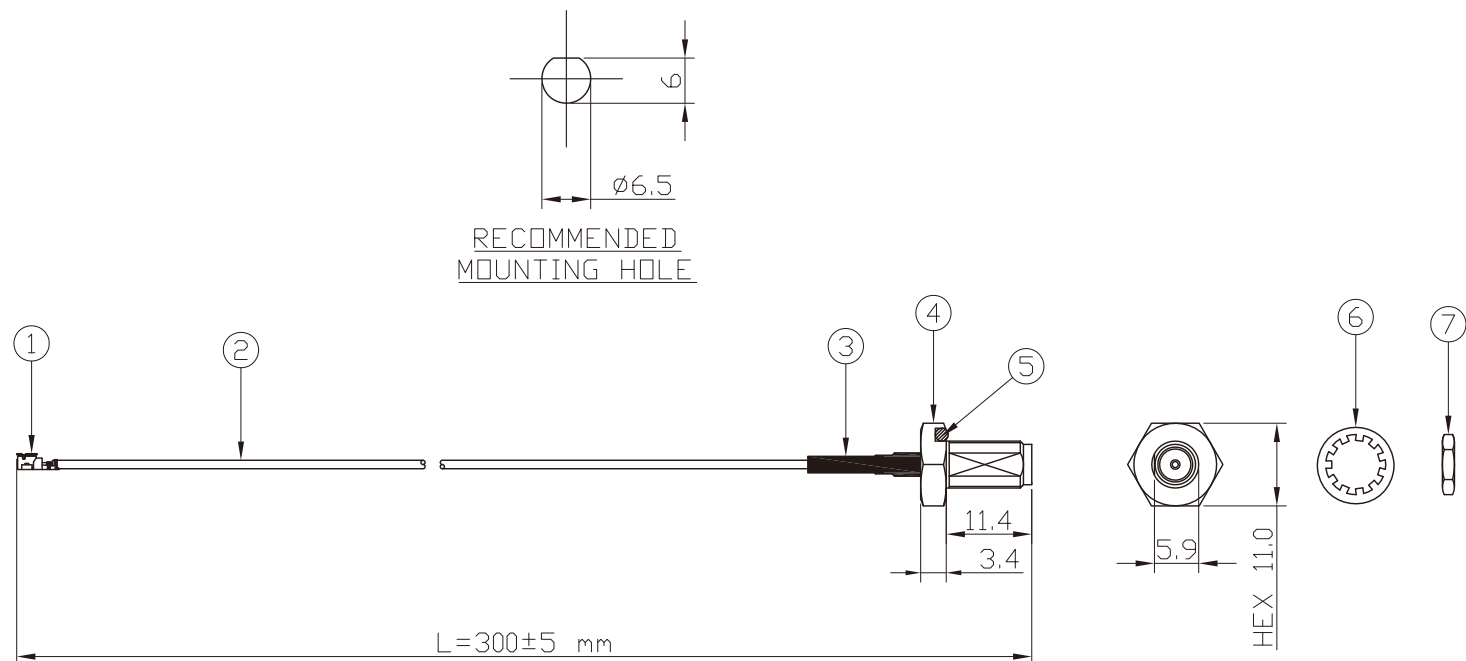

Note:

(1) The orientation should be the same as shown. (加工製程需遵照圖面標示方向,IPEX朝上,D平面朝前)

(2) C02AD31113005外部防水圈在妥善與機構鎖配後可達IP65

07	Nut	1
06	Washer	1
05	O-ring	1
04	SMA bulk Jack HEX11.0 with O-ring	1
03	Heatshrink (Black)	1
02	1.13-MIT coaxial cable (Gray)	1
01	I-PEX MHF Plug	1
NO	DESCRIPTION	Q'TY

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MHFSMA-1R1S113IP65-E30C-LF

SERIES

RT/ST

IP65

1.13mm DIA CABLE

LEADFREE

300mm

MALE TO FEMALE

DESCRIPTION: IPEX to 1.13(GR) to SMA(F)st.bh.O-ring,L=300mm