


NOTES:

- 1: ANY OPEN OR MISWIRE SHORT OR INTERMITTENCE ARE NOT PERMITTED.
- 2: CABLE MUST IS RoHS COMPLIANT
- 3: TEST CANDITIONS:TEST VOLTAGE: DC 300V/0.01S  
 INSULATION RESISTANCE: 10M ohm(MIN)  
 CONDUCTION RESISTANCE: 3 ohm(MAX)

PIN ASSIGNMENT

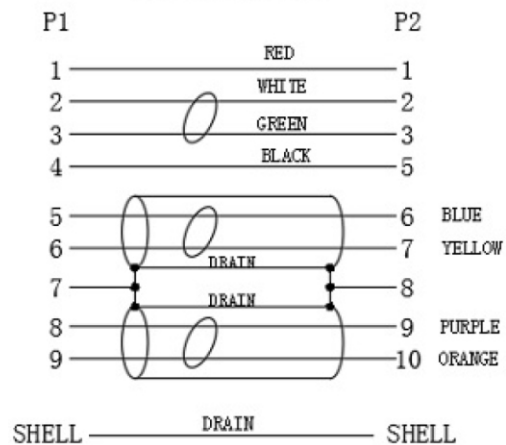

5	OVERMOLD	PVC 45P BLACK	15	g
4	INNERMOLD	内模料-LD-PE	6	g
3	CONN.	MICRO-USB 3.0 B TYPE MALE 半通槽-超薄型。黑色胶芯 铁壳镀镍 -短体 (QD)	1	SET
2	CONN.	USB 3.0 A TYPE MALE PIN:GOLD PLATED 蓝色胶芯 NICKEL PLATED SHELL --短体(YT)	1	SET
1	CABLE	无印字-USB 3.0 (1P*30AWG+D+AL+MY)*2C+30AWG*1P+24AWG*2C AEB D.W:1/0.254BC OD:4.5±0.2mm PVC JACKET:BLACK (KB)	600	mm
NO	P/N	DESCRIPTION	Q'TY	UNIT

RoHS Compliant




煜倫股份有限公司

www.morethanall.com

DRAWING BY CY		TOLERANCES ARE X.± .X± .XX± .XXX± ANG±
CHECKED BY GENIUS		
UNIT/mm	SCALE 1:1	
DATE		
SIZE A4	PPOJECTION	

照片框

ORDER INFORMATION

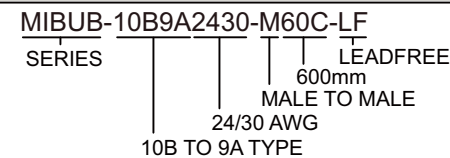

DESCRIPTION: