


1830±30

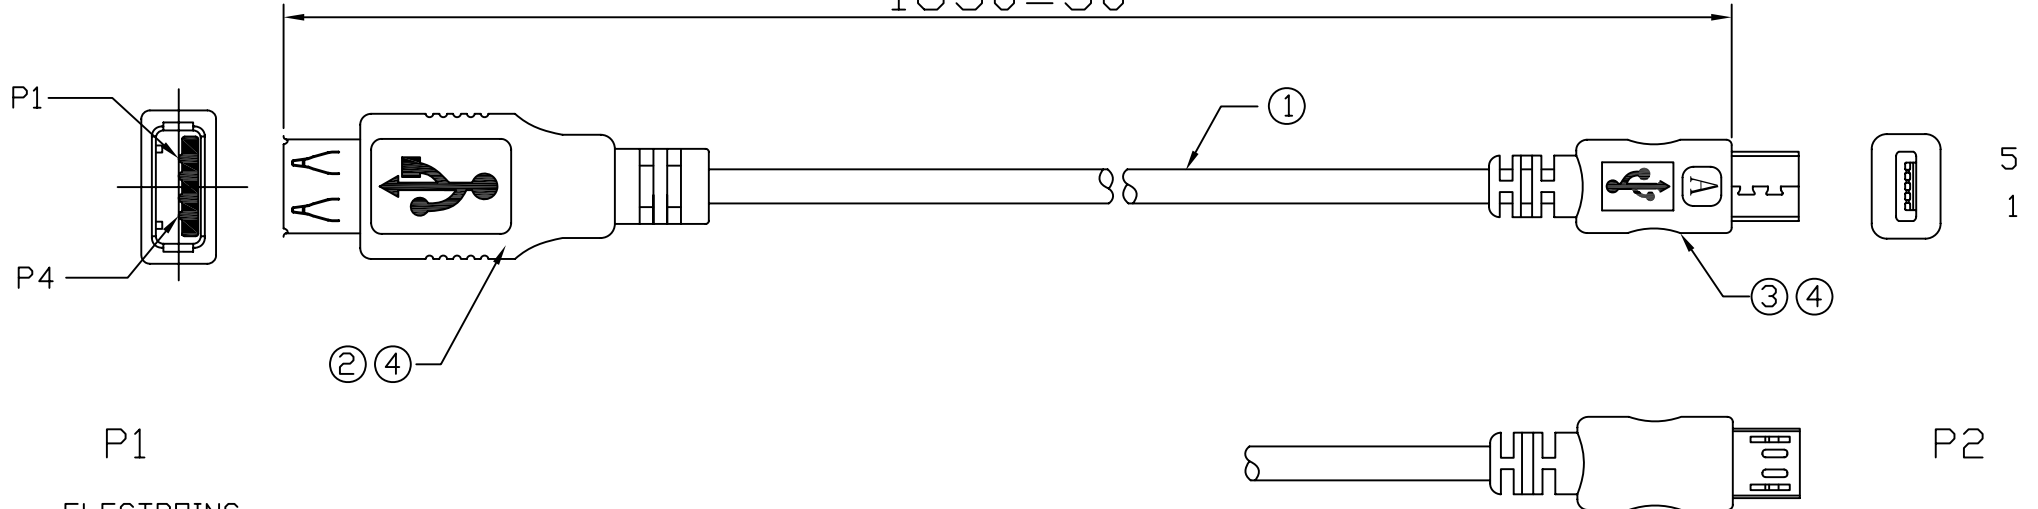

一. ELECTROINC

1. Any open miswiring & short intermittent are not permitted.
2. Insulation resistance: 10M ΩHMS,DC 300V 0.5MA, 1SEC.
3. Conduetive Resisitace: 2 ΩHMS(MAX)


二. Material Requinements:

All applicable material must be in compliance with council specification of RoHS.

MIBUB-5A4A-E1M83-LF
LEADFREE

RoHS Compliant

COMP ARABLE WITH:

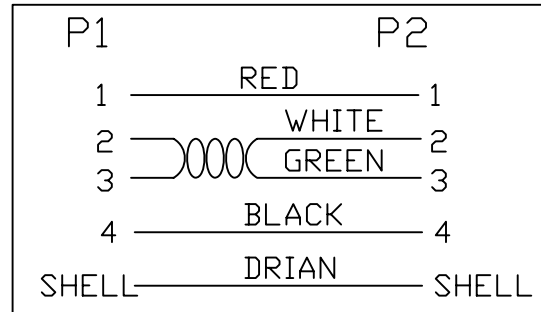

NO	NAME	SPECIFICATION	QTY
4	OVERMOLD	45P PVE COLOR BLACK	16G
3	CONNECTOR	MICRO USB A TYPE 5P MALE GOLD PLATED INSULATOR BLACK, SHEEL PLATED NICKEL	1PCS
2	CONNECTOR	USB A TYPE 4P FEMALE INSULATOR WHITE, PIN GOLD FLASH, SHEEL PLATED NICKEL	1PCS
1	CALBE	UL 2725 28*1PR+28AWG*2C+AEB 65% JACKIT COLOR BLACK, OD: 3.8MM	A/R



PART NO. MIBUB-5A4A-E1M83

DWG NO. MIBUB-5A4A-E1M83

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X±0.2
.XX±
.XXX±
AWG

DESCRIPTION: MICRO USB A TO USB A/F CABLE

AREA

REVISIONS

HK

DATE

煜倫股份有限公司