


MIBUB-5B4A-M1M83-LF
LEADFREE

COMP ARABLE WITH:

| | | | |
|----|-----------|---|------|
| 4 | OVERMOLD | 45P PVE COLOR BLACK | 16G |
| 3 | CONNECTOR | MICRO USB B TYPE 5P MALE GOLD PLATED INSULATOR BLACK, SHEEL PLATED NICKEL | 1PCS |
| 2 | CONNECTOR | USB A TYPE 4P MALE INSULATOR WHITE, PIN GOLD FLASH, SHELL PLATED NICKEL | 1PCS |
| 1 | CALBE | UL 2725 28*1PR+28AWG*2C+AEB 65% JACKIT COLOR BLACK, OD: 3.8MM | A/R |
| NO | NAME | SPECIFICATION | QTY |

- ELECTROINC
- 1. Any open miswiring & short intermittent are not permitted.
- 2. Insulation resistance: 10M OHMS,DC 300V 0.5MA, 1SEC.
- 3. Conduetive Resisitace: 2 OHMS(MAX)
- Material Requirements:
- All applicable material must be in compliance with councili specificetion of RoHS.

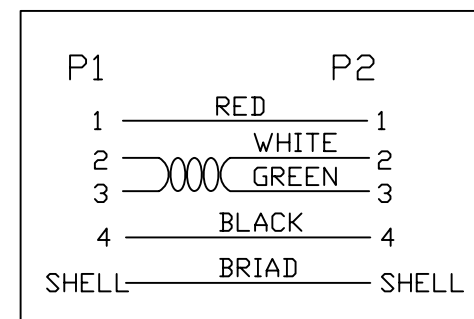

RoHS Compliant



PART NO. MIBUB-5B4A-M1M83

DWG NO. MIBUB-5B4A-M1M83

FILE NO.

CHECKED BY CY

DRAWING BY

TOLERANCES ARE
.X±0.2
.XX±
.XXX±
AWG

UNIT / mm

SCALE 1:1

PROJECTION

DESCRIP TION: MICRO USB B TO USB A/M CABLE

| | | | |
|------|-----------|----|------|
| AREA | REVISIONS | HK | DATE |
|------|-----------|----|------|

煜倫股份有限公司