


- ELECTROINC
- 1. Any open miswiring & short intermittent are not permitted.
- 2. Insulation resistance: 10M OHMS,DC 300V 0.5MA, 1SEC.
- 3. Conductive Resisitace: 2 OHMS(MAX)
- Material Requirements:
- All applicable material must be in compliance with councili specificetion of RoHS.

COMP ARABLE WITH:

4	OVERMOLD	45P PVE COLOR BLACK	16G
3	CONNECTOR	MICRO USB B TYPE 5P MALE GOLD PLATED INSULATOR BLACK, SHEEL PLATED NICKEL	1PCS
2	CONNECTOR	USB A TYPE 4P MALE INSULATOR WHITE, PIN GOLD FLASH, SHELL PLATED NICKEL	1PCS
1	CALBE	UL 2725 28*1PR+28AWG*2C+AEB 65% JACKIT COLOR BLACK, OD: 3.8MM	A/R
NO	NAME	SPECIFICATION	QTY

MIBUB-5B4A-M6F-LF
LEADFREE
RoHS Compliant

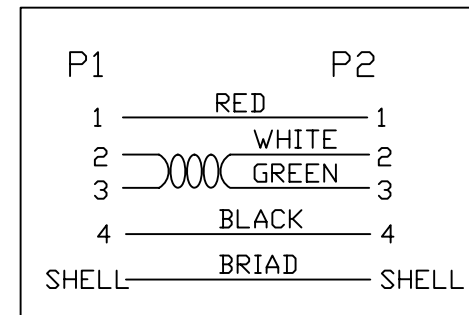

PART NO. MIBUB- 5B4A-M6F

DWG NO. MIBUB- 5B4A-M6F

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X±0.2
.XX±
.XXX±
AWG

DESCRIP TION: MICRO USB B TO USB A/M CABLE

AREA

REVISIONS

HK

DATE

煜倫股份有限公司