


NOTES:

1. 100% OPEN & SHORTS AND MISS WIRE TEST.
 - a. CONTACT RESISTANCE: 5 OHM MAX.
 - b. INSULATION RESISTANCE: 5M OHM MIN.
 - c. HI-POT: DC300V/0.01S.
2. ALL MATERIALS SHALL COMPLY WITH ROHS.

WIRING DIAGRAM		
P1	P2	COLOR
1	1	RED
2	2	WHITE
3	3	GREEN
4	4+5	BLACK
SHELL	SHELL	BRAID

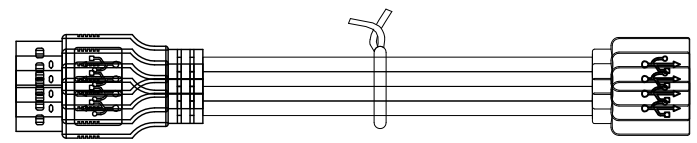

包裝方式
每10PCS用扎帶綁成一把

⑤	OUTER MOLDING: 50P PVC, COLOR: BLACK	7 G
④	HEAT SHINK TUBE: ϕ 1.0*8MM, COLOR: BLACK	1 PC
③	MICRO USB B/F: SOLDERING TYPE, SHELL: NICKEL PLATING, INSULATED: BLACK COLOR, CONTACT: GOLD FLASH	1 SET
②	USB A/M: SOLDERING TYPE, SHELL: NICKEL PLATING, INSULATION: WHITE COLOR, CONTACT: GOLD FLASH	1 SET
①	CABLE: 28AWG*1PAIR+28AWG*2C+AB, OD: 3.8 MM, JACKET: PVC, COLOR: BLACK (XC. BR04-011)	145 MM
PART	DESCRIPTION	QTY

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY		X. ± .X ± .XX ± .XXX ± ANG ±
CHECKED BY GENIUS		
UNIT / mm	SCALE 1 : 1	
DATE		
SIZE A4	PJECTION	



ORDER INFORMATION

MIBUB-5B4A28-A15C-LF
SERIES | LEADFREE
150mm
FEMALE TO MALE
28AWG
5 PIN B TO 4 PIN A TYPE

DESCRIPTION: USB A/M TO MICRO USB 5P/F